10/2017 Page 1

Specifications.



The ne	wΒ	M	W
sDrive	20i.		

BMW X2 sDrive20i			
Body			
No of doors/seats		5/5	
		4360 / 1824 / 1526	
_ength/width/height (unladen)	mm	2670	
Vheelbase	mm		
Frack, front/rear	mm	1563 / 1562	
Ground clearance	mm	182	
Furning circle	m	11.3	
Fuel tank capacity	approx. I	51	
Engine oil ¹⁾		5.25	
Veight, unladen, to DIN/EU	kg	1460 / 1535	
Max load to DIN	kg	595	
Vlax permissible weight	kg	2055	
/lax axle load, front/rear	kg	1055 / 1030	
/lax trailer load,	kg	1800 / 750	
oraked (12%)/unbraked			
Aax roofload/max towbar	kg	75 / 80	
lownload			
Luggage comp capacity		470 – 1355	
Air resistance	Cd x A	0.29 x 2.37	
	OuxA	0.23 × 2.01	
Power Unit			
Config/No of cyls/valves		In-line/4/4	
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precisio Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing	
Effective capacity	CC	1998	
Stroke/bore	mm	94.6 / 82.0	
Compression ratio	:1	11.0	
Fuel		min. RON 91	
/lax output	kW/hp	141/192	
· · · · · · · · · · · · · · · · · · ·		5000 - 6000	
lav torguo	rpm	280	
Max torque	Nm		
at	rpm	1350 – 4600	
Electrical System			
Battery/installation	Ah/–	70 / Engine compartment	
Driving Dynamics and Safe Suspension, front	ety	Single-joint spring-strut axle in lightweight aluminium-steel construction	
, ,			
Suspension, rear		Multi-arm axle in lightweight steel construction with separate spring and	
Dualiza frant		damper configuration	
Brakes, front		Single-piston floating-calliper disc brakes, vented	
Brakes, rear		Single-piston floating-calliper disc brakes, vented	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), DBC (Dynamic Brake Control), brake drying function, Fading Compensation, Start- Off Assistant, EDLC (Electronic Differential Lock Control), Performance Control, trailer stability control; optional: Dynamic Damper Control		
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver an front passenger, head airbags for front and rear seats, three-point inertia-re seatbelts on all seats (belt latch tensioner and belt force limiter at the fron seats), crash sensors, tyre defect indicator	
Steering		Electric Power Steering (EPS) with Servotronic function;	
Steering ratio, overall	:1	optional: M Servotronic 15.9	
		225/55 R17 97W	
yres, front/rear			
		225/55 R17 97W	
Rims, front/rear		7.5J x 17 light-alloy /	
		7.5J x 17 light-alloy	

10/2017 Page 2

		BMW X2 sDrive20i
Transmission		
Type of transmission		7-speed Steptronic dual-clutch transmission
Gear ratios	I :1	4.154
	II :1	2.45
	III :1	1.393
	IV :1	0.975
	V :1	0.755
	VI :1	0.675
	VII :1	0.547
	VIII :1	
	R :1	3.357
Final drive	:1	3.789
Performance		
Power-to-weight ratio	kg/kW	10.4
Output per litre	kW/I	70.6
Acceleration 0–100 km/ł	ו s	7.7
In 5th gear 80–120 km/h	S	
Top speed	km/h	227
BMW EfficientDynamics		
BMW EfficientDynamics standard features		Electric Power Steering, Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimisec aerodynamic attributes, map-regulated oil pump, tyres with reduced rolling resistance
Fuel Consumption ECE ²⁾		
Urban	l/100 km	7.2 - 6.8
Extra-urban	l/100 km	5.1 – 4.8

Fuel Consumption E	CE ²		
Urban	l/100 km	7.2 - 6.8	
Extra-urban	l/100 km	5.1 – 4.8	
Combined	l/100 km	5.9 – 5.5	
CO ₂	g/km	134 – 126	
Emission rating		EU6	

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

 1 Oil change 2 Fuel consumption and CO $_2$ emissions depend on the selected tyre format

10/2017 Page 3

The new BMW X2. xDrive20d, xDrive25d.

		BMW X2 xDrive20d	BMW X2 xDrive25d	
Body				
No of doors/seats		5/5	5/5	
Length/width/height (unladen)	mm	4360 / 1824 / 1526	4360 / 1824 / 1526	
Wheelbase	mm	2760	2760	
Track, front/rear	mm	1563 / 1562	1563 / 1562	
Ground clearance	mm	182	182	
Turning circle	m	11.3	11.3	
Fuel tank capacity	approx. I	51	51	
Engine oil ¹⁾	1	6.3	5.0	
Weight, unladen, to DIN/EU	kg	1600/1675	1585/1660	
Max load to DIN	kg	590	595	
Max permissible weight	kg	2190	2180	
Max axle load, front/rear	kg	1120/1100	1125/1085	
Max trailer load,	kg	2000 / 750	2000 / 750	
braked (12%)/unbraked				
Max roofload/max towbar	kg	75/80	75/80	
download				
Luggage comp capacity	1	470 – 1355	470 – 1355	
Air resistance	Cd x A	0.28 x 2.37	0.29 x 2.37	
	Gaxit			
Power Unit				
Config/No of cyls/valves		In-line/4/4	In-line/4/4	
Engine technology	BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common-rail direct injection			
Effective capacity	CC	1995	1995	
Stroke/bore	mm	90.0/84.0	90.0 / 84.0	
Compression ratio	:1	16.5	16.5	
Fuel		Diesel	Diesel	
Max output	kW/hp	140 / 190	170/231	
at	rpm	4000	4400	
Max torque	Nm	400	450	
at	rpm	1750 – 2500	1500 – 3000	
Electrical System				
Battery/installation	Ah/–	70 / Engine compartment	70 / Engine compartment	
Driving Dynamics and Safe	tv			
Suspension, front	. ,	Single-joint spring-strut axle in lightweight a	luminium-steel construction	
Suspension, rear		Multi-arm axle in lightweight steel construct		
		damper configurat		
Brakes, front		Single-piston floating-calliper dis		
Brakes, rear		Single-piston floating-calliper dis		
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dy (Dynamic Brake Control), brake drying function Off Assistant, EDLC (Electronic Differential Control, trailer stability control, HDC (Hill Des xDrive all-wheel-drive system; optional: [n, Fading Compensation, Start- Lock Control), Performance cent Control), networked with	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats (belt latch tensioner and belt force limiter at the front seats), crash sensors, tyre defect indicator			
Steering		Electric Power Steering (EPS) with \$		
		optional: M Servotr	onic	
Steering ratio, overall	:1	15.9	15.9	
Tyres, front/rear		225/55 R17 97W	225/55 R17 97W	
Rims, front/rear		7.5J x 17 light-alloy	7.5J x 17 light-alloy	

10/2017 Page 4

		BMW X2 xDrive20d	BMW X2 xDrive25d
Transmission			
Type of transmission		8-speed Steptronic	8-speed Steptronic
Gear ratios	:1	5.519	5.25
II	:1	3.184	3.029
	:1	2.05	1.95
IV	:1	1.492	1.457
V	:1	1.235	1.221
VI	:1	1.000	1.000
VII	:1	0.801	0.809
VIII	:1	0.673	0.673
R	:1	4.221	4.015
Final drive	:1	2.851	2.955
Performance			
Power-to-weight ratio	kg/kW	11.4	9.3
Output per litre	kW/I	70.2	85.2
Acceleration 0–100 km/h	S	7.7	6.7
In 5th gear 80–120 km/h	S		
Top speed	km/h	221	237
BMW EfficientDynamics			
BMW EfficientDynamics		ric Power Steering, Auto Start Stop func	
		PO mode with coasting function BMW/	Efficientl instruction antimic of

standard features

ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes, map-regulated oil pump, tyres with reduced rolling resistance, efficiency- and weight-optimised all-wheel drive, BMW BluePerformance technology

Fuel Consumption	ECE ²⁾		
Urban	l/100 km	5.4 - 5.2	5.9 – 5.7
Extra-urban	l/100 km	4.5 - 4.3	4.9 - 4.7
Combined	l/100 km	4.8 - 4.6	5.3 – 5.1
CO ₂	g/km	126 – 121	139 – 133
Emission rating		EU6	EU6


Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight) ^{10}Oil change $^{21}\text{Fuel}$ consumption and CO₂ emissions depend on the selected tyre format

10/2017 Page 5


Output and torque diagrams. The new BMW X2.




sDrive20i.

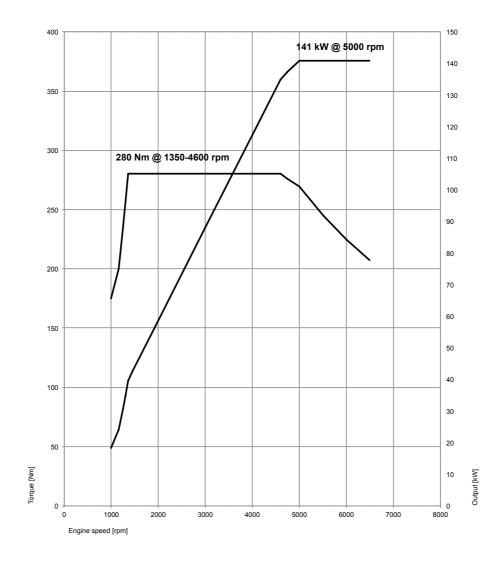

10/2017 Page 6 The new BMW X2. xDrive20d.

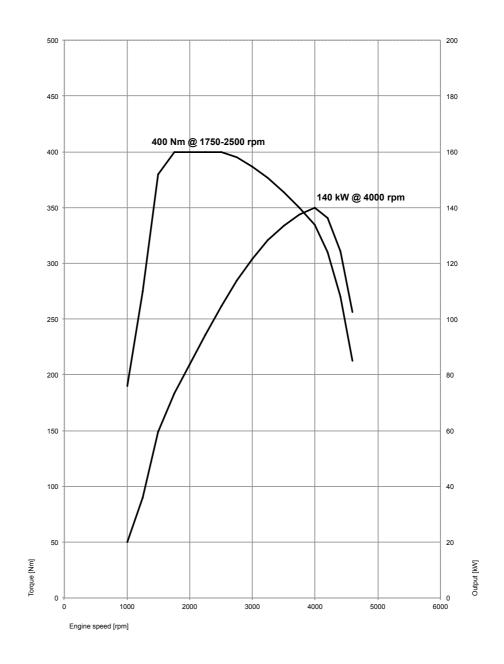

10/2017 Page 7 The new BMW X2. xDrive25d.

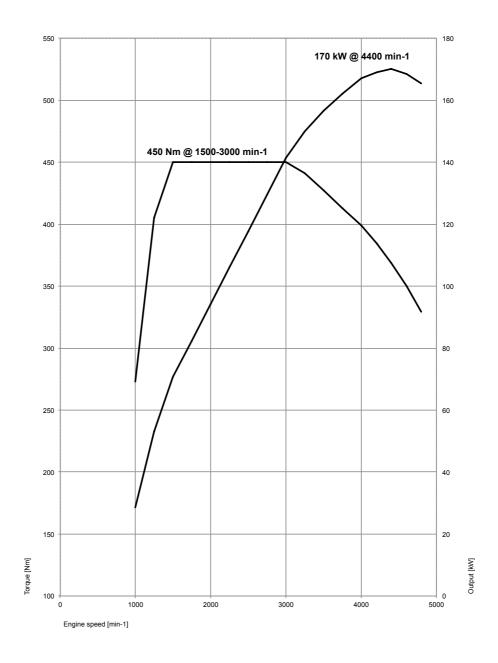

10/2017 Page 8 Exterior and interior dimensions. The new BMW X2.



