#### Technical specifications. The new BMW X7. X7 xDrive40i.



		BMW X7 xDrive40i
D. d.		
Body No of doors/seats		5 / 7 (6) <sup>1)</sup>
Length/width/height (unladen) Wheelbase	mm	5151 / 2000 / 1805 3105
Track, front/rear	mm	1684 / 1705
Turning circle	<u>mm</u> m	13.0
Fuel tank capacity		83
Engine oil 2)	approx. I	6.5
Weight, unladen, to DIN/EU	kg	2320 / 2395
Max load to DIN	kg	835
Max permissible weight	kg	3155
Max axle load, front/rear		1340 / 1910
Max trailer load, braked	kg	13407 1910
(12%)/unbraked	kg	2200 / 750
Max roofload/max towbar download	kg	100 / 140
Luggage comp capacity	I	326 – 2120
Air resistance	c <sub>d</sub> x A	0.33 x 3.00
Power Unit		
Config/No of cyls/valves		In-line / 6 / 4
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing
Effective capacity	CC	2998
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	11.0
Fuel		min. RON 87
Max output	kW/hp	250 / 340
at	rpm	5500 – 6500
Max torque	Nm	450
at	rpm	1500 – 5200
Electrical System		
Battery/installation	Ah/–	80 / luggage compartment
Driving Dynamics and Safet	ty	
Suspension, front		Oouble-wishbone axle in aluminium construction; air suspension with automatic self-levelling
Suspension, rear	F	ive-link axle in lightweight steel construction; air suspension with automatic self- levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems	F	Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, ading Compensation, Start-Off Assistant, DSC networked with xDrive all-wheel-drive system, ADB-X (Automatic Differential Brake), HDC (Hill Descent Control), Adaptive suspension; optional: active roll stabilisation
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front assenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter in the front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS);
		optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Tyres, front/rear		275/50 R20 113W XL
Rims, front/rear		8.5J x 20 light-alloy

		BMW X7 xDrive40i
Transmission		
Type of transmission		Eight-speed Steptronic transmission
Gear ratios I	:1	5.250
deal fatios		3.360
		2.172
	V :1	1,720
	/ :1	1.316
	/ .1 /l :1	1.000
	/II :1	0.822
	/II :1	0.640
	R :1	3.712
Final drive	:1	3.636
<u>Final drive</u>	:1	3.030
Performance		
Power-to-weight ratio (DIN)	kg/kW	9.3
Output per litre	kW/l	83.4
Acceleration 0–100 km/l	h s	6.1
Top speed	km/h	245
Off-road characteristics		
Angle of approach/departure	0	25.0 / 22.2
Breakover angle	0	19.8
Ground clearance when	mm	221
unladen		
Fording depth (at 7 km/h)	mm	500
BMW EfficientDynamics		
BMW EfficientDynamics		Brake Energy Regeneration with recuperation display, Electric Power Steering
standard features		(EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with
		coasting function, BMW EfficientLightweight, optimised aerodynamic attributes,
		on-demand operation of ancillary units, map-regulated oil pump, efficiency- and
		weight-optimised all-wheel drive, differential and transfer case with optimised
		warm-up behaviour, tyres with reduced rolling resistance
Fuel Consumption ECE 3)		
Urban	I/100 km	3)
Extra-urban	1/100 km	3)
Combined	1/100 km	9.0 – 8.7
CO <sub>2</sub>		9.0 - 6.7 205 - 198
Emission rating	g/km	
Emission rating		EU0U- I EIVIP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight) All technical specifications are provisional

The fuel consumption,  $CO_2$  emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on  $CO_2$  emissions, the  $CO_2$  values may differ from the values stated here (depending on national legislation).

<sup>1)</sup> With optional individual seats in the second row

<sup>&</sup>lt;sup>2)</sup> Oil change <sup>3)</sup> Figures not yet available

## The new BMW X7.

X7 xDrive50i	
(Not available in	Europe)

		BMW X7 xDrive50i
Dadu		
Body No of doors/seats		5 / 7 (6) <sup>1)</sup>
Length/width/height (unladen)	mm	5177 (6)
Wheelbase	mm	3105
Track, front/rear	mm mm	1684 / 1705
Turning circle	m	13.0
		83
Engine oil 2)	approx. I	10.5
Weight, unladen, to DIN/EU	kg	2460 / 2535
Max load to DIN	kg	795
Max permissible weight	kg	3255
Max axle load, front/rear	kg	1445 / 1920
Max trailer load, braked		14437 1920
(12%)/unbraked	kg	2700 / 750
Max roofload/max towbar	ka	100 / 140
download	kg	100 / 140
Luggage comp capacity		326 – 2120
Air resistance	c <sub>d</sub> x A	0.34 x 3.00
7 11 10010101100	Og X / t	0.0 T X 0.00
Power Unit		
Config/No of cyls/valves		V/8/4
Engine technology		BMW TwinPower Turbo technology: two TwinScroll turbochargers, High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing
Effective capacity	СС	4395
Stroke/bore	mm	88.3 / 89.0
Compression ratio	:1	10.5
Fuel		min. RON 91
Max output	kW/hp	340 / 462
at	rpm	5250 – 6000
Max torque	Nm	650
at	rpm	1500 – 4750
Electrical System		
Battery/installation	Ah/-	80 / luggage compartment
Driving Dynamics and Safet	.,	
Suspension, front	-	Double-wishbone axle in aluminium construction; air suspension with automatic
Suspension, none		self-levelling
Suspension, rear	F	Five-link axle in lightweight steel construction; air suspension with automatic self- levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems	F	Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant, DSC networked with xDrive all-wheeldrive system, ADB-X (Automatic Differential Brake), HDC (Hill Descent Control), Adaptive suspension; optional: active roll stabilisation, electronically controlled rear differential lock
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter in the front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS);
		optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Turas front/roor		275/50 R20 113W XL
Tyres, front/rear Rims, front/rear		273/30 N20 113W NL

		BMW X7 xDrive50i
Transmission		
Type of transmission		Eight-speed Steptronic transmission
Gear ratios I	:1	5,500
		3.520
	:1	2.200
	/ :1	1.720
	′ :1	1,317
	Ί :1	1.000
		0.823
	'II :1	0.640
		3.993
Final drive	:1	3.385
Performance		
Power-to-weight ratio (DIN)	kg/kW	7.2
Output per litre	kW/l	77.4
Acceleration 0–100 km/h	n s	5.4
Top speed	km/h	250
Off-road characteristics		
Angle of approach/departure	0	25.0 / 22.2
Breakover angle	0	19.8
Ground clearance when	mm	221
unladen		
Fording depth (at 7 km/h)	mm	500
BMW EfficientDynamics		
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with
		coasting function, BMW EfficientLightweight, optimised aerodynamic attributes on-demand operation of ancillary units, map-regulated oil pump, efficiency- and
		weight-optimised all-wheel drive, differential and transfer case with optimised warm-up behaviour, tyres with reduced rolling resistance
Fuel Consumption ECE		
Urban	I/100 km	3)
Extra-urban	I/100 km	3)
Combined	I/100 km	11.4
CO <sub>2</sub>	g/km	261
Emission rating	<u>_</u>	· · · · · · · · · · · · · · · · · · ·

All technical specifications are provisional

The fuel consumption,  $CO_2$  emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on  $CO_2$  emissions, the  $CO_2$  values may differ from the values stated here (depending on national legislation).

<sup>1)</sup> With optional individual seats in the second row Oil change

<sup>3)</sup> Figures not yet available

#### The new BMW X7. X7 xDrive30d.

		BMW X7 xDrive30d
Body		
No of doors/seats		5 / 7 (6) <sup>1)</sup>
Length/width/height (unladen)	mm	5151 / 2000 / 1805
Wheelbase	mm	3105
Track, front/rear	mm	1684 / 1705
Turning circle	m	13.0
Fuel tank capacity	approx. I	80
Engine oil 2)		6.5
Weight, unladen, to DIN/EU	kg	2370 / 2445
Max load to DIN	kg	850
Max permissible weight	kg	3220
Max axle load, front/rear	kg	1365 / 1950
Max trailer load, braked	kg	
(12%)/unbraked	J	2200 / 750
Max roofload/max towbar	kg	100 / 140
download		
Luggage comp capacity		326 – 2120
Air resistance	c <sub>d</sub> x A	0.33 x 3.00
Power Unit		
Config/No of cyls/valves		In-line / 6 / 4
Engine technology	В	MW TwinPower Turbo technology: turbocharger with variable inlet geometry,
3		common-rail direct injection with piezo injectors
		(max. injection pressure: 2500 bar)
Effective capacity	CC	2993
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		Diesel
Max output	kW/hp	195 / 265
at	rpm	4000
Max torque	Nm	620
at	rpm	2000 – 2500
Floatsiaal Costans		
Electrical System Battery/installation	Ah/-	00 / luggaga comportment
<u>Dattery/iriStaliation</u>	AII/-	90 / luggage compartment
<b>Driving Dynamics and Safe</b>	ty	
Suspension, front	D	ouble-wishbone axle in aluminium construction; air suspension with automatic
Cuananajan ra	<u></u>	self-levelling
Suspension, rear	FIV	re-link axle in lightweight steel construction; air suspension with automatic self- levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems	S	tandard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
3, .,		Brake Control), DBC (Dynamic Brake Control), Dry Braking function,
	Fa	ding Compensation, Start-Off Assistant, DSC networked with xDrive all-wheel-
	d	rive system, ADB-X (Automatic Differential Brake), HDC (Hill Descent Control),
		Adaptive suspension; optional: active roll stabilisation
Safety equipment	S	tandard: airbags for driver and front passenger, side airbags for driver and front
	pa	ssenger, head airbags for front and rear seats, three-point inertia-reel seatbelts
		on all seats with belt stopper, belt latch tensioner and belt force limiter in the
		front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS);
		optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Tyres, front/rear		275/50 R20 113W XL
Rims, front/rear		8.5J x 20 light-alloy

			BMW X7 xDrive30d
Transmission			
Type of transmis	ssion		Eight-speed Steptronic transmission
Gear ratios		:1	5,500
	ll l	:1	3.520
	III	:1	2.200
	IV	:1	1.720
	V	:1	1.317
	VI	:1	1.000
	VII	:1	0.823
	VIII	:1	0.640
	R	:1	3,993
Final drive		:1	3.077
Performance			
Power-to-weight	t ratio (DIN)	kg/kW	12.2
Output per litre	, ,	kW/l	65.2
Acceleration	0-100 km/h	S	7.0
Top speed		km/h	227
Off-road chara	cteristics		
Angle of approac	ch/departure	0	25.0 / 22.2
Breakover angle		0	19.8
Ground clearanc unladen	e when	mm	221
Fording depth (a	it 7 km/h)	mm	500
BMW Efficient	Dynamics		
BMW EfficientD standard feature	ynamics	(	Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes, on-demand operation of ancillary units, map-regulated oil pump, efficiency- and weight-optimised all-wheel drive, differential and transfer case with optimised warm-up behaviour, tyres with reduced rolling resistance, BMW Blue Performance technology with SCR catalyst
Fuel Consump	tion ECE		
Urban		I/100 km	3)
Extra-urban		I/100 km	3)
Combined		I/100 km	6.8 – 6.5
CO <sub>2</sub>		g/km	178 – 171
Emission rating			EU6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight) All technical specifications are provisional

The fuel consumption,  $CO_2$  emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on  $CO_2$  emissions, the  $CO_2$  values may differ from the values stated here (depending on national legislation).

 $<sup>\</sup>stackrel{\text{1}}{\sim}$  With optional individual seats in the second row

<sup>&</sup>lt;sup>2)</sup> Oil change <sup>3)</sup> Figures not yet available

### The new BMW X7. X7 M50d.

		BMW X7 M50d
Pody		
Body No of doors/seats		5 / 7 (6) <sup>1)</sup>
Length/width/height (unladen)	mm	5151 / 2000 / 1805
Wheelbase	mm	3105
Track, front/rear	mm	1682 / 1703
Turning circle	m	13.0
Fuel tank capacity	approx. I	80
Engine oil 2)		6.5
Weight, unladen, to DIN/EU	kg	2460 / 2535
Max load to DIN	kg	830
Max permissible weight	kg	3290
Max axle load, front/rear	kg	1415 / 1945
Max trailer load, braked	kg	
(12%)/unbraked		2600 / 750
Max roofload/max towbar download	kg	100 / 140
Luggage comp capacity		326 – 2120
Air resistance	c <sub>d</sub> x A	0.34 x 3.00
Power Unit		
		In line / G / A
Config/No of cyls/valves Engine technology	n.	In-line / 6 / 4  1 Performance TwinPower Turbo technology: multi-stage turbocharging with
Engine technology		our turbochargers (two turbochargers for the high-pressure stage and two for the low-pressure stage), high-pressure turbochargers with variable inlet geometry, common-rail direct injection with piezo injectors (max. injection pressure: >2500 bar)
Effective capacity	CC	2993
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.0
Fuel		Diesel
Max output	kW/hp	294 / 400
at	rpm	4400
Max torque	Nm	760
at	rpm	2000 – 3000
Electrical System		
Battery/installation	Ah/–	90 / luggage compartment
Driving Dynamics and Safe		
Suspension, front		ouble-wishbone axle in aluminium construction; air suspension with automatic self-levelling
Suspension, rear	Fiv	e-link axle in lightweight steel construction; air suspension with automatic self- levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems	Fac dr	andard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, ding Compensation, Start-Off Assistant, DSC networked with xDrive all-wheelive system, ADB-X (Automatic Differential Brake), HDC (Hill Descent Control), Adaptive suspension, electronically controlled rear differential lock; optional: active roll stabilisation,
Safety equipment	pas	andard: airbags for driver and front passenger, side airbags for driver and front ssenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter in the front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS); optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Tyres, front/rear		285/45 R21 113Y XL

		BMW X7 M50d
Transmission		
Type of transmission		Eight-speed Steptronic transmission
Gear ratios		5,500
Gear ratios		3,520
	:1    :1	2,200
	IV :1	1.720
	V :1	1.720
	V :1	<u> </u>
		1.000
	VII :1	0.823
	***	0.640
	R :1	3.993
Final drive	:1	3.231
Performance		
Power-to-weight ratio (DI	N) kg/kW	8.4
Output per litre	kW/l	98.2
Acceleration 0–100 l	km/h s	5.4
Top speed	km/h	250
Off-road characteristic	cs	
Angle of approach/depart	ure °	25.0 / 22.2
Breakover angle	0	19.8
Ground clearance when unladen	mm	221
Fording depth (at 7 km/h)	mm	500
BMW EfficientDynami	re	
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes on-demand operation of ancillary units, map-regulated oil pump, efficiency- and weight-optimised all-wheel drive, differential and transfer case with optimised warm-up behaviour, BMW Blue Performance technology with SCR catalyst
Fuel Consumption EC	E	
Urban	l/100 km	3)
Extra-urban	l/100 km	3)
Combined	l/100 km	7.4 – 7.0
CO <sub>2</sub>	g/km	193 – 185
Emission rating	<u> </u>	EU6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight) All technical specifications are provisional

The fuel consumption,  $CO_2$  emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.


The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on  $CO_2$  emissions, the  $CO_2$  values may differ from the values stated here (depending on national legislation).


<sup>1)</sup> With optional individual seats in the second row

<sup>2)</sup> Oil change 3) Figures not yet available

# Output and torque diagrams. The new BMW X5. X7 xDrive40i.



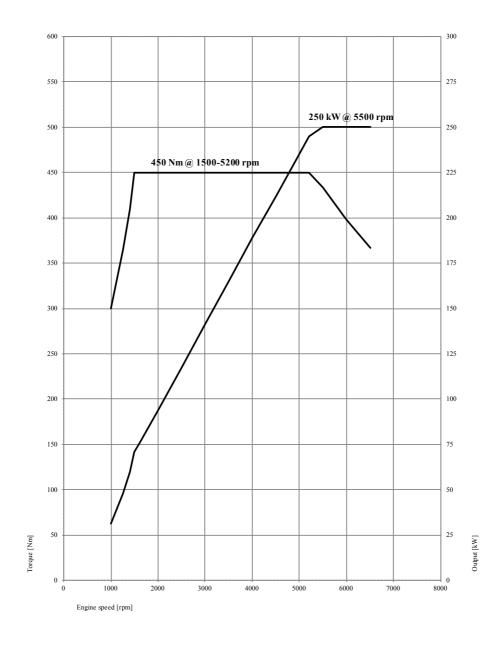

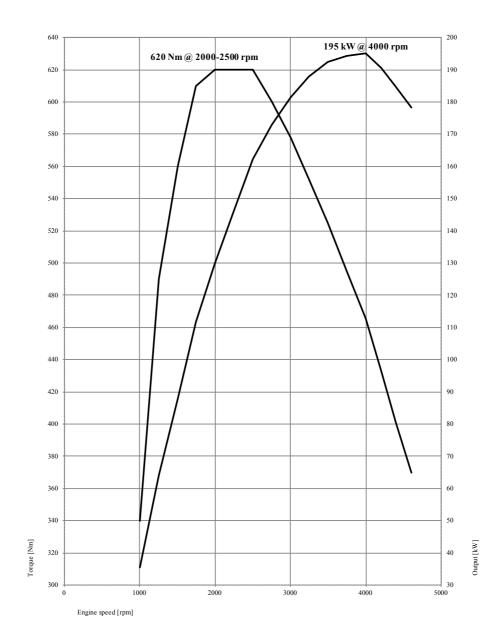


1000

Engine speed [rpm]

2000

3000

4000

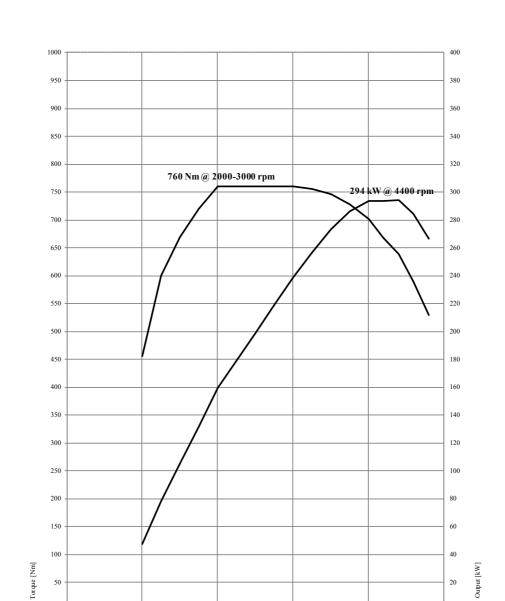

5000

#### **Exterior and interior dimensions.** The new BMW X7.



