10/2017 Page 1

Specifications. The new BMW X2. sDrive20i.



	BMW X2 sDrive20i		
Body			
No of doors/seats		5/5	
Length/width/height (unladen)	mm	4360 / 1824 / 1526	
Wheelbase	mm	2670	
	mm	1563 / 1562	
Track, front/rear	mm	182	
Ground clearance	mm		
Turning circle	m	11.3	
Fuel tank capacity	approx. I	51	
Engine oil ¹⁾		5.25	
Weight, unladen, to DIN/EU	kg	1460 / 1535	
Max load to DIN	kg	595	
Max permissible weight	kg	2055	
Max axle load, front/rear	kg	1055 / 1030	
Max trailer load,	kg	1800 / 750	
braked (12%)/unbraked	-		
Max roofload/max towbar	kg	75/80	
download			
Luggage comp capacity		470 – 1355	
Air resistance	Cd x A	0.29 x 2.37	
	20.71		
Power Unit			
Config/No of cyls/valves		In-line/4/4	
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precision	
6 63		Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS	
		variable camshaft timing	
Effective capacity	CC	1998	
Stroke/bore	mm	94.6 / 82.0	
Compression ratio	:1	11.0	
Fuel		min. RON 91	
Max output	kW/hp	141/192	
		5000 - 6000	
at May targua	rpm Nm		
Max torque			
at	rpm	1350 – 4600	
Electrical System			
Battery/installation	Ah/–	70 / Luggage compartment	
Driving Dynamics and Safet	у		
Suspension, front		Single-joint spring-strut axle in lightweight aluminium-steel construction	
Suspension, rear		Multi-arm axle in lightweight steel construction with separate spring and	
		damper configuration	
Brakes, front		Single-piston floating-calliper disc brakes, vented	
Brakes, rear		Single-piston floating-calliper disc brakes, vented	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), DBC	
Enving stability systems		(Dynamic Brake Control), brake drying function, Fading Compensation, Start-	
		Off Assistant, EDLC (Electronic Differential Lock Control), Performance	
		Control, trailer stability control; optional: Dynamic Damper Control	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and	
		front passenger, head airbags for front and rear seats, three-point inertia-ree	
		seatbelts on all seats (belt latch tensioner and belt force limiter at the front	
		seats), crash sensors, tyre defect indicator	
Steering		Electric Power Steering (EPS) with Servotronic function;	
		optional: M Servotronic	
Steering ratio, overall	:1	15.9	
Tyres, front/rear		225/55 R17 97W	
		225/55 R17 97W	
Rims, front/rear		7.5J x 17 light-alloy /	

10/2017 Page 2

	BMW X2 sDrive20i		BMW X2 sDrive20i		
Transmission					
Type of transmission			7-speed Steptronic dual-clutch transmission		
Gear ratios	I	:1	4.154		
		:1	2.45		
		:1	1.393		
	IV	:1	0.975		
	V	:1	0.755		
	VI	:1	0.675		
	VII	:1	0.547		
	VIII	:1			
	R	:1	3.357		
Final drive		:1	3.789		
Performance					
Power-to-weight ratio		kg/kW	10.4		
Output per litre		kW/I	70.6		
Acceleration 0–100 kr	n/h	S	7.7		
In 5th gear 80–120 km/h		S			
Top speed		km/h	227		
BMW EfficientDynamics	s				
BMW EfficientDynamics standard features			Electric Power Steering, Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimise aerodynamic attributes, map-regulated oil pump, tyres with reduced rolling resistance		

Fuel Consumption ECE ²⁾				
Urban	l/100 km	7.2 – 6.8		
Extra-urban	l/100 km	5.1 – 4.8		
Combined	l/100 km	5.9 – 5.5		
CO ₂	g/km	134 – 126		
Emission rating		EU6		

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Oil change
²⁾ Fuel consumption and CO₂ emissions depend on the selected tyre format

10/2017 Page 3

The new BMW X2. xDrive20d, xDrive25d.

		BMW X2 xDrive20d	BMW X2 xDrive25d	
Body				
No of doors/seats		5/5	5/5	
Length/width/height (unladen)		4360 / 1824 / 1526	4360 / 1824 / 1526	
Wheelbase	mm	2760	2760	
	mm	1563 / 1562	1563 / 1562	
Track, front/rear Ground clearance	mm	182	182	
Turning circle	m	11.3	11.3	
Fuel tank capacity		51	51	
Engine oil ¹⁾	approx. I	6.3	5.0	
Weight, unladen, to DIN/EU	ka	1600/1675	1585/1660	
Max load to DIN	kg	590	595	
Max permissible weight	kg	2190	2180	
	kg	1120/1100	1125/1085	
Max axle load, front/rear	kg	2000 / 750	2000 / 750	
Max trailer load,	kg	20007750	20007750	
braked (12%)/unbraked Max roofload/max towbar	ka	75/80	75/80	
download	kg	13180	13180	
		470 – 1355	470 – 1355	
Luggage comp capacity	Cd x A	0.28 x 2.37	0.29 x 2.37	
Air resistance	CaxA	0.20 % 2.37	0.29 X 2.37	
Power Unit				
Config/No of cyls/valves		In-line/4/4	In-line/4/4	
Engine technology	BN	/W TwinPower Turbo technology: turbocha common-rail direct i	с <u>, , , , , , , , , , , , , , , , , , ,</u>	
Effective capacity	CC	1995	1995	
Stroke/bore	mm	90.0 / 84.0	90.0 / 84.0	
Compression ratio	:1	16.5	16.5	
Fuel	.1	Diesel	Diesel	
Max output	kW/hp	140 / 190	170/231	
at		4000	4400	
Max torque	rpm Nm	4000	4400	
at	rpm	1750 – 2500	1500 - 3000	
Electrical System				
Battery/installation	Ah/–	70 / Luggage compartment	70 / Luggage compartment	
Driving Dynamics and Safet	y			
Suspension, front	-	Single-joint spring-strut axle in lightweight	aluminium-steel construction	
Suspension, rear	Multi-arm axle in lightweight steel construction with separate spring and			
		damper configura		
Brakes, front		Single-piston floating-calliper o		
Brakes, rear		Single-piston floating-calliper o		
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), DBC (Dynamic Brake Control), brake drying function, Fading Compensation, Start-			
	Off Assistant, EDLC (Electronic Differential Lock Control), Performance Control, trailer stability control, HDC (Hill Descent Control), networked with			
	(xDrive all-wheel-drive system; optional:		
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and			
	front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats (belt latch tensioner and belt force limiter at the front			
Ctooring		seats), crash sensors, tyre o		
Steering		Electric Power Steering (EPS) with		
Stooring ratio everall	:1	optional: M Servot 15.9		
Steering ratio, overall Tyres, front/rear	:1		15.9 225/55 R17 97W	
Rims, front/rear		7.5J x 17 light-alloy	7.5J x 17 light-alloy	

10/2017 Page 4

			BMW X2 xDrive20d	BMW X2 xDrive25d
Transmission				
Type of transmissio	n		8-speed Steptronic	8-speed Steptronic
Gear ratios	I	:1	5.519	5.25
		:1	3.184	3.029
		:1	2.05	1.95
	IV	:1	1.492	1.457
	V	:1	1.235	1.221
	VI	:1	1.000	1.000
	VII	:1	0.801	0.809
	VIII	:1	0.673	0.673
	R	:1	4.221	4.015
Final drive		:1	2.851	2.955
Performance				
Power-to-weight rat	tio	kg/kW	11.4	9.3
Output per litre		kW/l	70.2	85.2
Acceleration 0-	-100 km/h	S	7.7	6.7
In 5th gear 80-	-120 km/h	S		
Top speed		km/h	221	237
BMW EfficientDy	namics			
BMW EfficientDyna			Electric Power Steering, Auto Start Stop f	unction, Optimum Shift Indicator,

standard features

Electric Power Steering, Auto Start Stop function, Optimum Snitt indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes, map-regulated oil pump, tyres with reduced rolling resistance, efficiency- and weight-optimised all-wheel drive, BMW BluePerformance technology

Fuel Consumption ECE ²⁾				
Urban	l/100 km	5.4 – 5.2	5.9 – 5.7	
Extra-urban	l/100 km	4.5 – 4.3	4.9 – 4.7	
Combined	l/100 km	4.8 - 4.6	5.3 – 5.1	
CO ₂	g/km	126 – 121	139 – 133	
Emission rating		EU6	EU6	


Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight) 9 Oil change 2 Fuel consumption and CO₂ emissions depend on the selected tyre format

10/2017 Page 5


Output and torque diagrams. The new BMW X2.

sDrive20i.




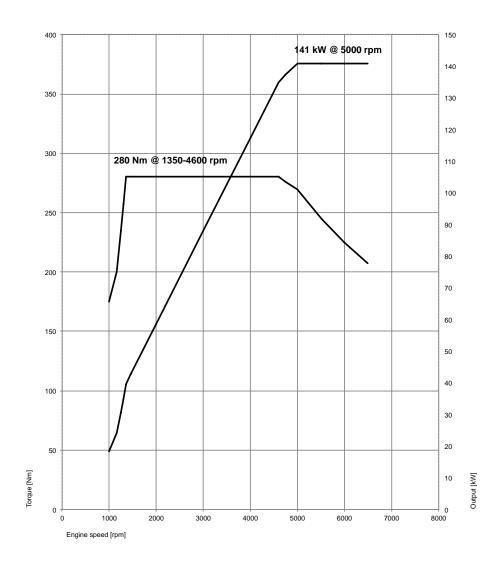

10/2017 Page 6 The new BMW X2. xDrive20d.

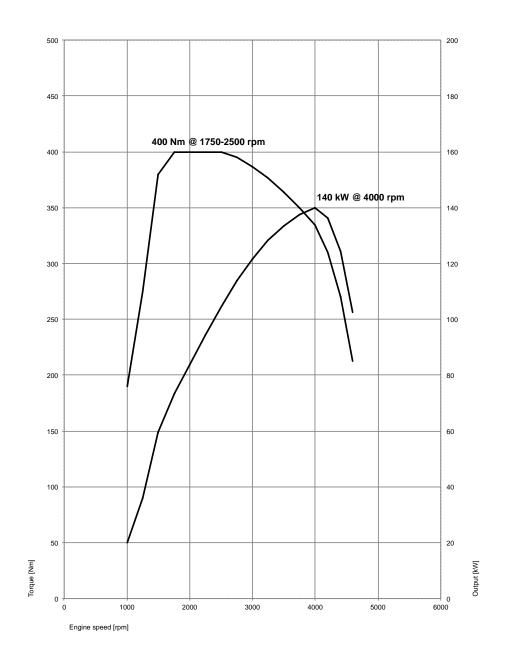

10/2017 Page 7 The new BMW X2. xDrive25d.

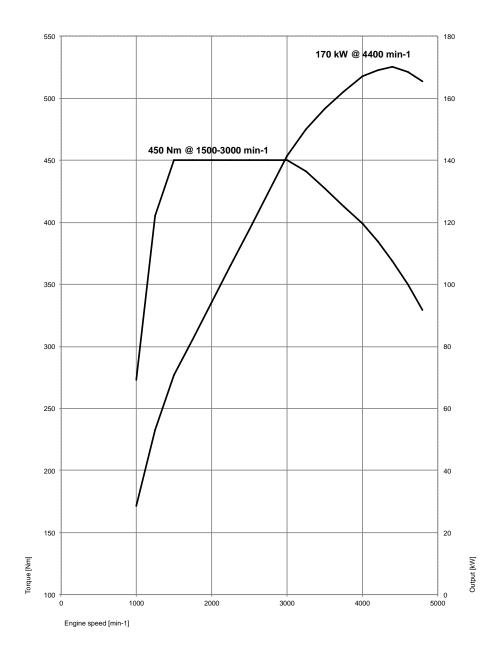

10/2017 Page 8 Exterior and interior dimensions.



The new BMW X2.

