Technical specifications. The new BMW X5. X5 xDrive40i.



		BMW X5 xDrive40i
Body		- (- (m. 1)
No of doors/seats		5 / 5 (7) 1)
Length/width/height (unladen)	mm	4922 / 2004 / 1745
Wheelbase	mm	2975
Track, front/rear	mm	1666 / 1685
Turning circle	m	12.6
	approx. I	83
Engine oil 2)	1.	6.5
Weight, unladen, to DIN/EU	kg	2060 / 2135 (2135 / 2210) 1)
Max load to DIN	kg	765 (895) ¹⁾
Max permissible weight	kg	2800 / 3010 1)
Max axle load, front/rear	kg	1280 / 1580 (1315 / 1825) ¹⁾
Max trailer load,	kg	
braked (12%)/unbraked		2700 / 750
Max roofload/max towbar download	kg	100 / 140
Luggage comp capacity	- 1	650 – 1870
<u>Air resistance</u>	c _d x A	0.32 x 2.90
Power Unit		
Config/No of cyls/valves		In-line / 6 / 4
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing
Effective consoity		2998
Effective capacity	CC	=***
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	11.0 ROZ87-98
Fuel	1.147//-	
Max output	kW/hp	250 / 340
at	rpm	5500 – 6500
Max torque	Nm	450
at	rpm	1500 – 5200
Electrical System		
Battery/installation	Ah/-	92 / luggage compartment
Driving Dynamics and Safet	:y	
Suspension, front		Double-wishbone axle in aluminium construction; optional: air suspension with automatic self-levelling
Suspension, rear		Five-link axle in lightweight steel construction; optional: air suspension with automatic self-levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems		Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
2g otdoty oyotomo		Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant, DSC networked with xDrive
		all-wheel-drive system, ADB-X (Active Differential Brake), HDC (Hill Descent Control), Dynamic Damper Control; optional: active roll stabilisation, electronically
		controlled rear differential lock
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter in the
		front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS);
5		optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Tyres, front/rear		255/55 R18 109W XL
Rims, front/rear		8.5J x 18 light-alloy
-,		and and

			BMW X5 xDrive40i
Transmission	1		
Type of transm			Eight-speed Steptronic transmission
Gear ratios		:1	5.250
acai ratios		:1	3.360
	<u>"</u>	:1	2.172
	IV	:1	1.720
	V	:1	1.316
	VI	:1	1.000
	VII	:1	0.822
	VIII	:1	0.640
	R	:1	3.712
Circulate a	R		
Final drive		:1	3.385
Performance			
Power-to-weigh	ht ratio (DIN)	kg/kW	8.2 (8.5) ¹⁾
Output per litre		kW/l	83.4
Acceleration	0-100 km/h	S	5.5
Top speed		km/h	243
Off-road char	acteristics		
Angle of approa	ach/departure	0	25.2 / 22.3
Breakover angle	e '	0	20.2
Ground clearan	ce when	mm	214
unladen			
Fording depth ((at 7 km/h)	mm	500
BMW Efficien	+Dynamics		
BMW Efficient[Brake Energy Regeneration with recuperation display, Electric Power Steering
standard featur	,		EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with
Stariuaru reatur	65		coasting function, BMW EfficientLightweight, optimised aerodynamic attributes,
			on-demand operation of ancillary units, map-regulated oil pump, efficiency- and
			weight-optimised all-wheel drive, differential and transfer case with optimised
			warm-up behaviour, tyres with reduced rolling resistance
Fuel Consum	ption ECE 3)		
Urban		I/100 km	10,6 - 10,4
Extra-urban		I/100 km	7,5 - 7,4
Combined		I/100 km	8.7 – 8.5
CO ₂		g/km	197 – 193
Emission rating			EU6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight) All technical specifications are provisional

4) Figures not yet available

The fuel consumption, CO₂ emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values for the vehicles marked * are already based on the new WLTP test cycle and have been translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO_2 emissions, the CO_2 values may differ from the values stated here (depending on national legislation).

The CO_2 efficiency specifications are determined according to Directive 1999/94/EC and the latest version of the Pkw-EnVKV, and based (for classification) on the fuel consumption and CO_2 values as per the NEDC cycle.

Further information on official fuel consumption figures and specific CO_2 emission values of new passenger cars is included in the following guideline: 'Leitfaden über den Kraftstoffverbrauch, die CO_2 -Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guideline for fuel consumption, CO_2 emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships and at https://www.dat.de/en/offers/publications/guideline-for-fuel-consumption.html.

¹⁾ With optional third seat row

³ Puel consumption and CO₂ emissions depend on the selected tyre format

The new BMW X5. X5 xDrive30d.

		BMW X5 xDrive30d
Body		5 (5 (7) 1)
No of doors/seats		5/5(7) 1)
Length/width/height (unladen)	mm	4922 / 2004 / 1745
Wheelbase	mm	2975
Track, front/rear	mm	1666 / 1685 12.6
Turning circle	m	<u> </u>
Fuel tank capacity Engine oil 2)	approx. I	80
Weight, unladen, to DIN/EU	- ka	6.5 2110 / 2185 (2185 / 2260) 1)
Max load to DIN	kg	770 (905) 1)
Max permissible weight	kg	2860 (3090) 1)
	kg	1320 / 1615 (1340 / 1870) 1)
Max axle load, front/rear Max trailer load.	kg	13207 1613 (13407 1870)
braked (12%)/unbraked	kg	2700 / 750
Max roofload/max towbar	ka	100 / 140
download	kg	
Luggage comp capacity	1	650 - 1870
Air resistance	c _d x A	0.31 x 2.90
Power Unit		
Config/No of cyls/valves		In-line / 6 / 4
Engine technology		BMW TwinPower Turbo technology: turbocharger with variable inlet geometry,
Engine toormology		common-rail direct injection with piezo injectors
		(max. injection pressure: 2500 bar)
Effective capacity	CC	2993
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel	1.1.4.77	Diesel 105 1005
Max output	kW/hp	195 / 265
at	rpm	4000
Max torque	Nm	620
at	rpm	2000 – 2500
Electrical System		
Battery/installation	Ah/–	92 / luggage compartment
Driving Dynamics and Safet Suspension, front	У	Double-wishbone axle in aluminium construction; optional: air suspension with
Suspension, none		automatic self-levelling
Suspension, rear		Five-link axle in lightweight steel construction; optional: air suspension with automatic self-levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems		Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
		Brake Control), DBC (Dynamic Brake Control), Dry Braking function,
		Fading Compensation, Start-Off Assistant, DSC networked with xDrive
		all-wheel-drive system, ADB-X (Active Differential Brake), HDC (Hill Descent
		Control), Dynamic Damper Control; optional: active roll stabilisation, electronically
		controlled rear differential lock
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front
	1	passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts
		on all seats with belt stopper, belt latch tensioner and belt force limiter in the
		front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS);
		optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Tyres, front/rear		255/55 R18 109W XL
Rims, front/rear		8.5J x 18 light-alloy

			BMW X5 xDrive30d
Transmission			
Type of transmis	sion		Eight-speed Steptronic transmission
Gear ratios	I	:1	5.500
	ll l	:1	3.520
	III	:1	2.200
	IV	:1	1.720
	V	:1	1.317
	VI	:1	1.000
	VII	:1	0.823
	VIII	:1	0.640
	R	:1	3.993
Final drive		:1	2.929
Performance			
Power-to-weight	ratio (DIN)	kg/kW	10.8 (11.2) ¹⁾
Output per litre		kW/l	65.2
Acceleration	0-100 km/h	S	6.5
Top speed		km/h	230
Off-road chara	cteristics		
Angle of approac	:h/departure	0	25.2 / 22.3
Breakover angle		0	20.2
Ground clearance unladen	e when	mm	214
Fording depth (a	t 7 km/h)	mm	500
BMW Efficient	Dynamics		
BMW EfficientDy standard features	/namics		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes, on-demand operation of ancillary units, map-regulated oil pump, efficiency- and weight-optimised all-wheel drive, differential and transfer case with optimised warm-up behaviour, tyres with reduced rolling resistance, BMW Blue Performance technology
Fuel Consump	tion ECE 3)		
Urban		I/100 km	7.5 – 6.8
Extra-urban		I/100 km	6.2 – 5.6
Combined		I/100 km	6.7 – 6.0
CO ₂		g/km	175 – 158
Emission rating			EU6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight) All technical specifications are provisional

The fuel consumption, CO_2 emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values for the vehicles marked * are already based on the new WLTP test cycle and have been translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO_2 emissions, the CO_2 values may differ from the values stated here (depending on national legislation).

The CO_2 efficiency specifications are determined according to Directive 1999/94/EC and the latest version of the Pkw-EnVKV, and based (for classification) on the fuel consumption and CO_2 values as per the NEDC cycle.

Further information on official fuel consumption figures and specific CO_2 emission values of new passenger cars is included in the following guideline: 'Leitfaden über den Kraftstoffverbrauch, die CO_2 -Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guideline for fuel consumption, CO_2 emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships and at https://www.dat.de/en/offers/publications/guideline-for-fuel-consumption.html.

¹⁾ With optional third seat row

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emissions depend on the selected tyre format

The new BMW X5. X5 M50d.

		BMW X5 M50d
Body		4)
No of doors/seats		5 / 5 (7) ¹⁾
Length/width/height (unladen)	mm	4922 / 2004 / 1745
Wheelbase	mm	2975
Track, front/rear	mm	1680 / 1687
Turning circle	m	12.6
	approx. I	80
Engine oil 2) Weight, unladen, to DIN/EU	l l	6.5 2275 / 2350 (2350 / 2425) ¹⁾
	kg	820 (880) ¹⁾
Max load to DIN	kg	3010 (3160) 1)
Max permissible weight Max axle load, front/rear	kg	1395 / 1670 (1405 / 1865) ¹⁾
Max trailer load,	kg	13937 1670 (14037 1803)
braked (12%)/unbraked	kg	2700 / 750
Max roofload/max towbar	kg	100 / 140
download	ng.	1007140
Luggage comp capacity	1	650 - 1870
Air resistance	c _d x A	0.32 x 2.90
	- 0	
Power Unit		
Config/No of cyls/valves		In-line / 6 / 4
Engine technology		M Performance TwinPower Turbo technology: multi-stage turbocharging with
3 3,		four turbochargers (two turbochargers for the high-pressure stage and two for
		the low-pressure stage), high-pressure turbochargers with variable inlet
		geometry, common-rail direct injection with piezo injectors
		(max. injection pressure: >2500 bar)
Effective capacity	CC	2993
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.0
Fuel		Diesel
Max output	kW/hp	294 / 400
at	rpm	4400
Max torque	Nm	760
at	rpm	2000 – 3000
Florida I O at a m		
Electrical System	Ah/-	02 / luggage compartment
Battery/installation	An/-	92 / luggage compartment
Driving Dynamics and Safety		
Suspension, front	у	Double-wishbone axle in aluminium construction; optional: air suspension with
Suspension, none		automatic self-levelling
Suspension, rear		Five-link axle in lightweight steel construction; optional: air suspension with
Gusperision, real		automatic self-levelling
Brakes, front		Single-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems		Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
3		Brake Control), DBC (Dynamic Brake Control), Dry Braking function,
		Fading Compensation, Start-Off Assistant, DSC networked with xDrive
		all-wheel-drive system, ADB-X (Active Differential Brake), HDC (Hill Descent
		Control), Dynamic Damper Control; optional: active roll stabilisation, electronically
		controlled rear differential lock
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front
	1	passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts
		on all seats with belt stopper, belt latch tensioner and belt force limiter in the
Chandra		front, crash sensors, tyre pressure indicator
Steering		Electric Power Steering (EPS);
Ctooring ratio grazul	.4	optional: Integral Active Steering
Steering ratio, overall	:1	18.7
Tyres, front/rear		275/40 R21 107Y XL/
Dime front/reer		315/35 R21 111Y XL
Rims, front/rear		9.5J x 21 light-alloy/ 10.5J x 21 light-alloy
		10.00 x Z 1 llylit-diluy

		BMW X5 M50d
Transmission		
Type of transmission		Eight-speed Steptronic transmission
Gear ratios	l :1	
deal fallos		
	IV :1	
	V :1	
	VI :1	
		212.12
	R :1	
Final drive	:1	3.154
Performance		
Power-to-weight ratio (D	IN) kg/kW	7.7 (8.0) 1)
Output per litre	kW/	98.2
Acceleration 0–100	km/h s	5.2
Top speed	km/h	250
Off-road characteristi	cs	
Angle of approach/depar	ture °	25.2 / 22.3
Breakover angle	C	20.2
Ground clearance when unladen	mm	214
Fording depth (at 7 km/h) mm	500
BMW EfficientDynami	ire	
BMW EfficientDynamics standard features	ics .	Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with coasting function, BMW EfficientLightweight, optimised aerodynamic attributes on-demand operation of ancillary units, map-regulated oil pump, efficiency- and weight-optimised all-wheel drive, differential and transfer case with optimised warm-up behaviour, BMW Blue Performance technology
Fuel Consumption EC	E 3)	
Urban		8.1 – 7.6
Extra-urban	I/100 km	
Combined	I/100 km	
CO ₂	g/km	
Emission rating	9/101	EU6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight) All technical specifications are provisional

The fuel consumption, CO₂ emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values for the vehicles marked * are already based on the new WLTP test cycle and have been translated back into NEDC-equivalent rile values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO_2 emissions, the CO_2 values may differ from the values stated here (depending on national legislation).

The CO_2 efficiency specifications are determined according to Directive 1999/94/EC and the latest version of the Pkw-EnVKV, and based (for classification) on the fuel consumption and CO_2 values as per the NEDC cycle.

Further information on official fuel consumption figures and specific CO_2 emission values of new passenger cars is included in the following guideline: 'Leitfaden über den Kraftstoffverbrauch, die CO_2 -Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guideline for fuel consumption, CO_2 emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships and at https://www.dat.de/en/offers/publications/guideline-for-fuel-consumption.html.


¹⁾ With optional third seat row


³ Vitti optional unit occasional of a control of the consumption and CO₂ emissions depend on the selected tyre format

BMW Media Information 6/2018 Page 9


Output and torque diagrams. The new BMW X5. X5 xDrive40i.



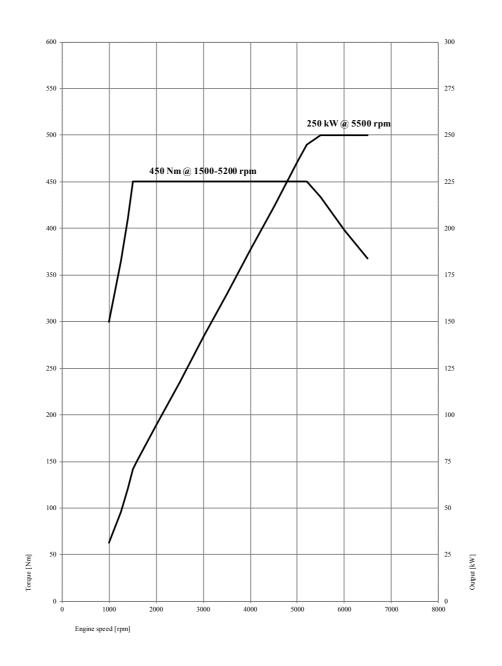

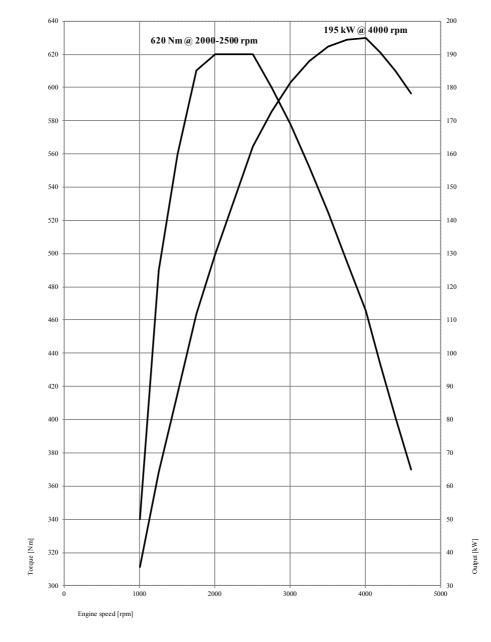


The new BMW X5. X5 M50d.

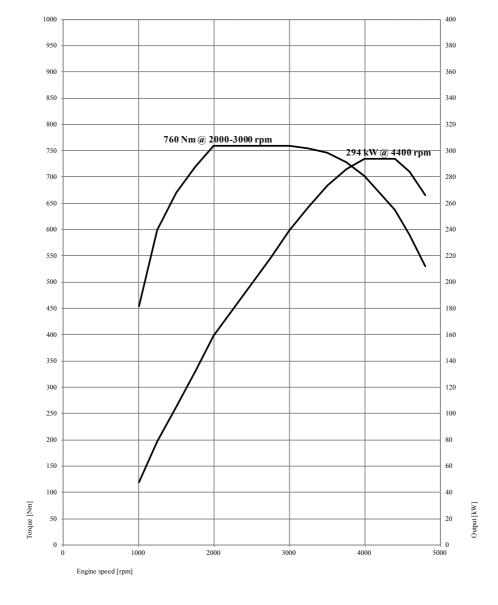



BMW Media Information 6/2018 Page 13

Exterior and interior dimensions. The new BMW X5.



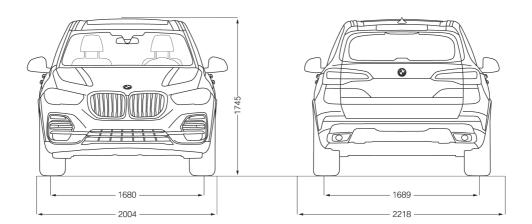

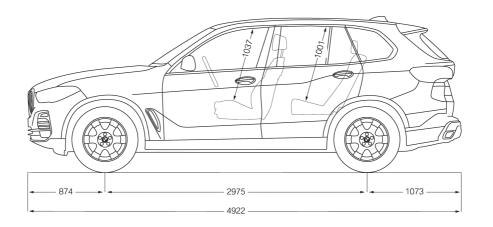

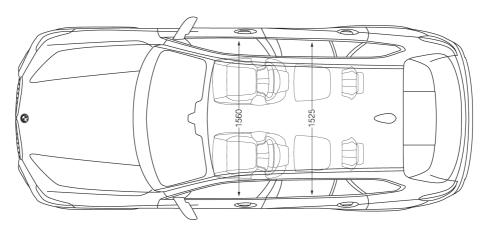

*dimensions in cm