BMW Media Information

09/2018 Page 1

Technical specifications. The new BMW Z4. Z4 sDrive20i.



		BMW Z4 sDrive20i
Body		
No of doors/seats		2/2
Length/width/height (unladen)	mm	4324 / 1864 / 1304
Wheelbase	mm	2470
Track, front/rear	mm	1609 / 1616
Ground clearance	mm	117
Turning circle	m	11.0
Fuel tank capacity	approx. I	52
Engine oil 1)	Г	5.25
Weight, unladen, to DIN/EU	kg	1405 / 1480
Max load to DIN	kg	335
Max permissible weight	kg	1740
Max axle load, front/rear	kg	830 / 935
Max trailer load, braked	kg	3307 300
(12%)/unbraked	'\9	- <i>l</i> -
Max roofload/max towbar	kg	
download	'\9	'
Luggage comp capacity	1	281
Air resistance	C _d x A	0.29 x 2.07
7 III 7 GOIGIGIA 10 G	90,777	OLEO NEIOV
Power Unit		
Config/No of cyls/valves		In-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing
Effective capacity	CC	1998
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	10.2
Fuel		Min. RON 91
Max output	kW/hp	145 / 197
at	rpm	4500 – 6500
Max torque	Nm	320
at	rpm	1450 – 4200
	.,p	1100 1200
Electrical System		
Battery/installation	Ah/-	80 / luggage compartment
Driving Dynamics and Safe	tv	
Suspension, front	-,	Double-joint spring-strut axle in lightweight aluminium-steel construction,
•		hydraulically damped torque strut bearings
Suspension, rear		Five-link axle in lightweight aluminium-steel construction
Brakes, front		Single-piston floating-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems		Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
		Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; optional: Adaptive M suspension
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front
		passenger with combined head airbags, three-point inertia-reel seatbelts with
		belt stopper, belt latch tensioner and belt force limiter, crash sensors, rollover
		protection system, tyre pressure indicator
Steering		Electric Power Steering (EPS) with Servotronic function,
		variable sport steering
Steering ratio, overall	:1	15.1
Tyres, front/rear		225/50 R17 98Y XL / 255/45 R17 98Y
Rims, front/rear		7.5J x 17 light-alloy / 8.5J x 17 light-alloy

Transmission Eight-speed Steptronic transmission Sear ratios 1	nission
Type of transmission	nission
Type of transmission	nission
Sear ratios	IISSIUIT
III	
IV	
V :1 1,316 VI :1 1,000 VII :1 0,822 VIII :1 0,640 R :1 3,712 Final drive :1 3,154 Performance Power-to-weight ratio (DIN) kg/kW 9,7 Output per litre kW/l 72.6 Acceleration O-100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics Brake Energy Regeneration with recuperation displace.	
VI :1 1.000	
VII :1 0.822	
VIII :1 0.640 R :1 3.712 Final drive :1 3.154 Performance Power-to-weight ratio (DIN) kg/kW 9.7 Output per litre kW/l 72.6 Acceleration 0–100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displace.	
R :1 3.712	
Final drive :1 3.154 Performance Power-to-weight ratio (DIN) kg/kW 9.7 Output per litre kW/l 72.6 Acceleration 0-100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displ	
Performance Power-to-weight ratio (DIN) kg/kW 9.7 Output per litre kW/l 72.6 Acceleration 0-100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displayed	
Power-to-weight ratio (DIN) kg/kW 9.7 Output per litre kW/l 72.6 Acceleration 0-100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics Brake Energy Regeneration with recuperation displayed.	
Output per litre kW/l 72.6 Acceleration 0-100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displayed.	
Acceleration 0–100 km/h s 6.6 Top speed km/h 240 BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displayed	
Top speed km/h 240 BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displ	
BMW EfficientDynamics BMW EfficientDynamics Brake Energy Regeneration with recuperation displ	
BMW EfficientDynamics Brake Energy Regeneration with recuperation displ	
BMW EfficientDynamics Brake Energy Regeneration with recuperation displ	
	av. Electric Power Steering
coasting function and Proactive Driving Assistant, I	
optimised aerodynamic attributes, active air flap co	ntrol, on-demand operation
of ancillary units, map-regulated oil pump, different	ial with optimised warm-up
behaviour, tyres with reduced rolling	resistance
Fuel Consumption ECE	
Urban I/100 km 7.4 – 7.3	
Extra-urban I/100 km 5.3 - 5.3	
Combined I/100 km 6.1 – 6.0	
CO ₂ g/km 139 – 138	
Emission rating Euro 6d-TEMP	

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight)

The fuel consumption, CO_2 emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO_2 emissions, the CO_2 values may differ from the values stated here (depending on national legislation).

Further information on official fuel consumption figures and specific CO_2 emission values of new passenger cars is included in the following guideline: Leitfaden über den Kraftstoffverbrauch, die CO_2 -Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guide to the fuel economy, CO_2 emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships, from Deutsche Automobil Treuhand GmbH (DAT), Hellmuth-Hirth-Str. 1, 73760 Ostfildern-Scharnhausen and at https://www.dat.de/co2/.

¹⁾ Oil change

The new BMW Z4. Z4 sDrive30i.

09/2018 Page 3

		BMW Z4 sDrive30i
Body		
No of doors/seats		2/2
Length/width/height (unladen)	mm	4324 / 1864 / 1304
Wheelbase	mm	2470
Track, front/rear	mm	1609 / 1616
Ground clearance	mm	117
Turning circle	m	11.0
Fuel tank capacity	approx. I	52
Engine oil 1)		5.25
Weight, unladen, to DIN/EU	kg	1415 / 1490
Max load to DIN	kg	325
Max permissible weight	kg	1740
Max axle load, front/rear	kg	830 / 935
Max trailer load, braked	kg	3307000
(12%)/unbraked	'\9	_1_
Max roofload/max towbar	kg	
download	Ng	- <i>I</i> -
Luggage comp capacity	1	281
Air resistance	C _d x A	0.29 x 2.07
All resistance	Cd X A	0.23 X 2.01
Power Unit		
Config/No of cyls/valves		In-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: TwinScroll turbocharger, High Precision
		Direct Injection, VALVETRONIC fully variable valve control,
		Double-VANOS variable camshaft timing
Effective capacity	CC	1998
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	10.2
Fuel		Min. RON 91
Max output	kW/hp	190 / 258
at	rpm	5000 – 6500
Max torque	Nm	400
at	rpm	1550 – 4400
El		
Electrical System Battery/installation	Ah/-	80 / luggage compartment
Datter ynn Stallation	AII/-	oo naggage compartment
Driving Dynamics and Safe	ety	
Suspension, front		Double-joint spring-strut axle in lightweight aluminium-steel construction,
		hydraulically damped torque strut bearings
Suspension, rear		Five-link axle in lightweight aluminium-steel construction
Brakes, front		Single-piston floating-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems		Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
		Brake Control), DBC (Dynamic Brake Control), Dry Braking function,
		Fading Compensation, Start-Off Assistant; optional: Adaptive M suspension, M
		Sport differential
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front
		passenger with combined head airbags, three-point inertia-reel seatbelts with
		belt stopper, belt latch tensioner and belt force limiter, crash sensors, rollover
		protection system, tyre pressure indicator
Steering		Electric Power Steering (EPS) with Servotronic function,
		variable sport steering
Steering ratio, overall	:1	15.1
Tyres, front/rear		225/50 R17 98Y XL / 255/45 R17 98Y
Rims, front/rear		7.5J x 17 light-alloy / 8.5J x 17 light-alloy
· · ·		

		BMW Z4 sDrive30i
Transmission		F: 10: 10: 1 : 1
Type of transmission		Eight-speed Steptronic transmission
Gear ratios	1 :1	5.250
	<u>II</u> :1	3.360
	<u>III :1</u>	2.172
	IV :1	1.720
	V :1	1.316
	VI :1	1.000
	VII :1	0.822
	VIII :1	0.640
	R :1	3.712
Final drive	:1	3.154
Performance		
Power-to-weight ratio (DII	N) kg/kW	7.4
Output per litre	kW/l	95.1
Acceleration 0-100 k	km/h s	5.4
Top speed	km/h	250
BMW EfficientDynamic	cs	
BMW EfficientDynamics		Brake Energy Regeneration with recuperation display, Electric Power Steering
standard features		(EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with
		coasting function and Proactive Driving Assistant, BMW EfficientLightweight,
		optimised aerodynamic attributes, active air flap control, on-demand operation
		of ancillary units, map-regulated oil pump, differential with optimised warm-up
		behaviour, tyres with reduced rolling resistance
Fuel Consumption ECI		
Urban	l/100 km	7.4 – 7.4
Extra-urban	l/100 km	5.3 – 5.2
Combined	l/100 km	6.1 – 6.0
CO ₂	g/km	139 – 138
Emission rating		Euro 6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight)

The fuel consumption, CO_2 emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO_2 emissions, the CO_2 values may differ from the values stated here (depending on national legislation).

Further information on official fuel consumption figures and specific CO_2 emission values of new passenger cars is included in the following guideline: Leitfaden über den Kraftstoffverbrauch, die CO_2 -Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guide to the fuel economy, CO_2 emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships, from Deutsche Automobil Treuhand GmbH (DAT), Hellmuth-Hirth-Str. 1, 73760 Ostfildern-Scharnhausen and at https://www.dat.de/co2/.

¹⁾ Oil change

The new BMW Z4. Z4 M40i.

09/2018 Page 5

		BMW Z4 M40i
Body		
No of doors/seats		2/2
Length/width/height (unladen)	mm	4324 / 1864 / 1304
Wheelbase	mm	2470
Track, front/rear	mm	1594 / 1589
Ground clearance	mm	114
	mm	
Turning circle	m	11.0
Fuel tank capacity Engine oil 1)	approx. I	52
	1	6.5
Weight, unladen, to DIN/EU	kg	1535 / 1610
Max load to DIN	kg	325
Max permissible weight	kg	1860
Max axle load, front/rear	kg	865 / 995
Max trailer load, braked	kg	
(12%)/unbraked		-/- -/-
Max roofload/max towbar	kg	-/-
download		
Luggage comp capacity		281
<u>Air resistance</u>	C _d x A	0.31 x 2.07
Power Unit		
Config/No of cyls/valves		In-line / 6 / 4
Engine technology		M Performance TwinPower Turbo technology: TwinScroll turbocharger, High
		Precision Direct Injection, VALVETRONIC fully variable valve control, Double-
		VANOS variable camshaft timing
Effective capacity	CC	2998
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	11.0
Fuel		Min. RON 91
Max output	kW/hp	250 / 340
at	rpm	5000 – 6500
Max torque	Nm	500
at	rpm	1600 – 4500
Electrical System		
Battery/installation	Ah/-	00 / huggaga comportment
Dattery/Installation	AII/-	90 / luggage compartment
Driving Dynamics and Safe	ty	
Suspension, front		Double-joint spring-strut axle in lightweight aluminium-steel construction,
		hydraulically damped torque strut bearings
Suspension, rear		Five-link axle in lightweight aluminium-steel construction
Brakes, front		Four-piston fixed-calliper disc brakes, vented
Brakes, rear		Single-piston floating-calliper disc brakes, vented
Driving stability systems		Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering
		Brake Control), DBC (Dynamic Brake Control), Dry Braking function,
		Fading Compensation, Start-Off Assistant, Adaptive M suspension,
		M Sport differential
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front
		passenger with combined head airbags, three-point inertia-reel seatbelts with
		belt stopper, belt latch tensioner and belt force limiter, crash sensors, rollover
		protection system, tyre pressure indicator
Steering		Electric Power Steering (EPS) with Servotronic function,
		variable sport steering
Steering ratio, overall	:1	15.1
Tyres, front/rear		255/40 ZR18 95Y / 275/40 ZR18 99Y
Rims, front/rear		9J x 18 light-alloy / 10J x 18 light-alloy

		BMW Z4 M40i
Transmission		
Type of transmission		Eight-speed Steptronic transmission
Gear ratios	l :1	5.250
	II :1	3.360
	III :1	2.172
	IV :1	1.720
	V :1	1.316
	VI :1	1.000
	VII :1	0.822
	VIII :1	0.640
	R :1	3.712
Final drive	:1	3.154
Performance		
Power-to-weight ratio (DIN	J) kg/kW	6.1
Output per litre	kW/l	83.4
Acceleration 0–100 kg	m/h s	4.6
Top speed	km/h	250
BMW EfficientDynamic	S	
BMW EfficientDynamics		Brake Energy Regeneration with recuperation display, Electric Power Steering
standard features		(EPS), Auto Start Stop function, Optimum Shift Indicator, ECO PRO mode with
		coasting function and Proactive Driving Assistant, BMW EfficientLightweight,
		optimised aerodynamic attributes, active air flap control, on-demand operation
		of ancillary units, map-regulated oil pump, differential with optimised warm-up behaviour
Fuel Consumption ECE		
Urban	I/100 km	9.2 – 9.2
Extra-urban	l/100 km	6.3 – 6.1
Combined	l/100 km	7.4 – 7.1
CO ₂	g/km	168 – 165
Emission rating		Euro 6d-TEMP

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight)

The fuel consumption, CO_2 emissions and electric power consumption figures were determined according to the European Regulation (EC) 715/2007 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.

The values are already based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO_2 emissions, the CO_2 values may differ from the values stated here (depending on national legislation).


Further information on official fuel consumption figures and specific CO_2 emission values of new passenger cars is included in the following guideline: Leitfaden über den Kraftstoffverbrauch, die CO_2 -Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guide to the fuel economy, CO_2 emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships, from Deutsche Automobil Treuhand GmbH (DAT), Hellmuth-Hirth-Str. 1, 73760 Ostfildern-Scharnhausen and at https://www.dat.de/co2/.

¹⁾ Oil change


BMW Media Information 09/2018 Page 7

Output and torque diagrams. The new BMW Z4. Z4 sDrive20i.




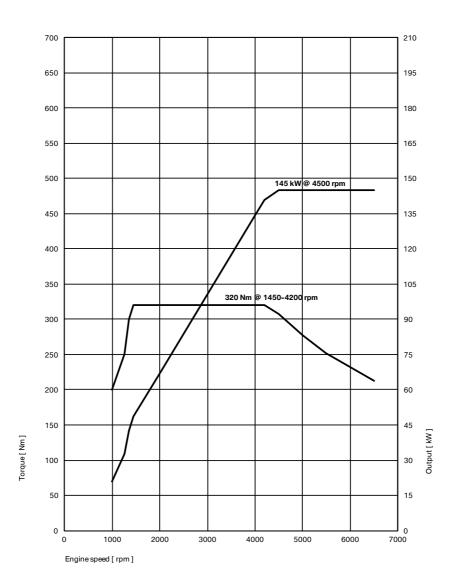

09/2018 Page 8

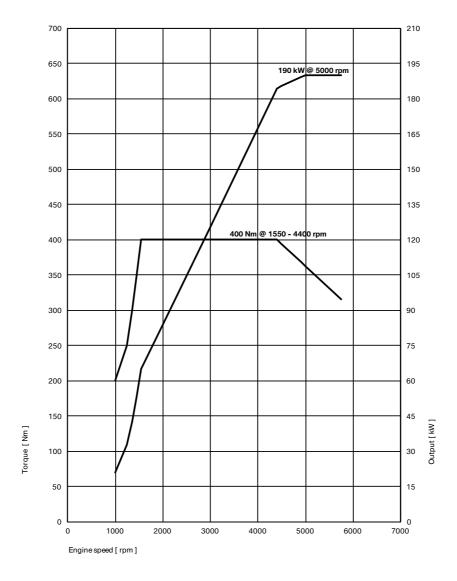



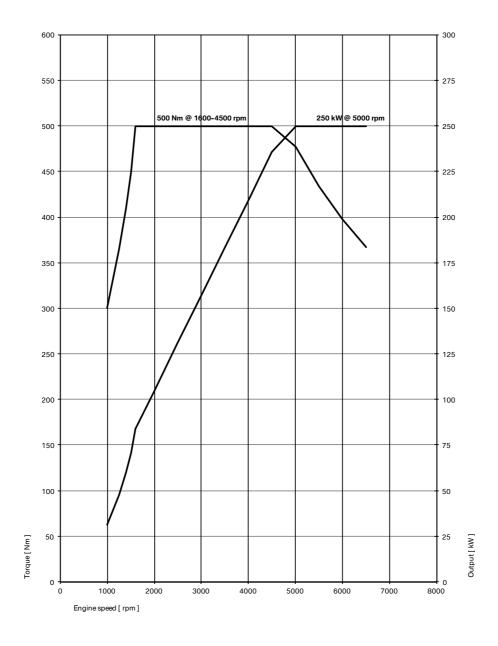

Exterior and interior dimensions.

O M A

The new BMW Z4.

