Specifications. The BMW Series 2 Gran Tourer. 216i, 218i, 220i.



Lengthwidthheight (unladen) mm 4568/1800/1608 4568/1800/1608 2780 2780 Wheibbae mm 2780 2780 2780 2780 Track, frontrear mm 1651/1562 156/11562 156/11562 Track, frontrear mm 165 165 165 Tuming cicle m 11.7 11.7 11.7 Fuel Rak capacity Approx. Itr 51 55 522 Weight, unladen, to DIN/EU kg 1410/1485 1415/1400 1485/1560 Max load to DIN kg 630 633 633 Max avale load, front/rear kg 100/055 1075/1065 1075/1065 Max robotad/max towbar kg 75/75 75/75 75/75 Max robotad/max towbar kg 75/75 75/75 75/75 Max robotad/max towbar kg 75/75 75/75 75/75 Oxing/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Loggage comp capacity			BMW 216i	BMW 218i	BMW 220i	
No of doors/seats 5/5 1/5	Body					
Lengthwildtheight (unladen) mm 4568/1800/1608 4568/1800/1608 4568/1800/1608 Wheelbase mm 2780 2780 2780 Track, frontrivar mm 1661/1562 1551/1562 1557/1565 Ground clearance mm 117 11.7 11.7 11.7 Funding circle m 11.7 11.7 11.7 11.7 Funding circle Max clead to DIN kg 630 633 633 Max load to DIN kg 630 630 633 633 Max ake load, font/rear kg 1000730 1500755 10751/065 Max robfoad/max towbar kg 75/7 75/75 75/75 Max robfoad/max towbar kg 75/75 75/75 75/75			5/5	5/5	5/5	
Wheelesse mm 2780 2780 2780 Track, front/tear mm 1561/1562 155/1/1562 155/1/1562 Turning circle m 11.7 11.7 11.7 Fuel tank capacity Approx. Itr 51 51 57 Fuel tank capacity Approx. Itr 51 51 52 Weight, unladen, to DIN/EU kg 1410/1485 1415/1490 1485/1566 Max permissible weight kg 2055 2060 (2000) 2144 Max permissible weight kg 1010/1055 1015/1055 1075/1066 Max rooffoad/max towbar kg 75/75 75/75 75/75 Max rooffoad/max towbar kg 75/75 75/75 75/75 Advinolad Luggage comp capacity Itr 645–1905 645–1905 645–1905 Max rooffoad/max towbar C_g x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/4/4 Engine technology <		mm				
Trads, front/rear mm 1561/1562 1561/1562 157/1563 Ground clearance mm 165 165 166 167 Turning circle m 11.7 11.7 11.7 11.7 Fuel tank capacity Approx. Itr 51 51 55 522 Weight, unladen, to DIN/EU kg 1410/1485 1415/1490 1485/1560 Max add to DIN kg 630 630 633 Max ade to DIN kg 1010/155 1015/1055 1075/1065 Max ade todd, front/rear kg 1100/730 1500/735 1500/755 Max trailer load, kg 1100/730 1500/735 1500/755 Max rooffoad/max towbaar kg 75/75 75/75 75/75 75/75 Apgrox, Itr 645-1905 645-1905 645-1905 645-1905 Max rooffoad/max towbaar In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Lyggage comp capacity Itr 645-1905 645-1905 645-1905						
Ground clearance mm 165 165 165 Turning circle m 11.7 11.7 11.7 Funding circle m 11.7 11.7 11.7 Liget tark capacity Approx. Itr 51 51 57 Weight, unladen, to DIN/EU kg 1410/1485 1415/1490 1445/1490 Max load to DIN kg 630 630 630 Max permissible weight kg 2055 2060 (2000) 2144 Max abe load, front/rear kg 1100/730 1500/735 1500/756 Max roofload/max towbar kg 75/75 75/75 75/75 Approxing Kg 75/75 75/75 75/75 Approxing Itr 645–1905 645–1905 645–1905 Ar resistance C ₀ x A 0.30 x.2.45 0.23 x.2.45 0.32 x.2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Config/No of cyls/valves In-line/3/4 In-line/3/4						
Turning circle m 11.7 11.7 11.7 11.7 Fuel tark capacity Approx.tr 51 51 55 Max period 1tr 4.25 4.25 5.22 Weight, unladen, to DIN/EU kg 1410/1485 1415/1490 1485/1560 Max load to DIN kg 630 630 633 Max ave load, front/rear kg 1010/1055 1015/1055 1075/1065 Max ave load, front/rear kg 1100/730 1500/755 1500/755 Max rooffoadmax towbar kg 75/75 75/75 75/75 Max rooffoadmax towbar kg 75/75 75/75 75/75 Odwmload 645–1905 645–1905 645–1905 645–1905 ConfigNo of cyls/valves In-line/3/4 In-line/3/4 In-line/4/4 ConfigNo of cyls/valves In-line/3/4 In-line/3/4 In-line/4/4 Engine technology BMW TwinPower Turbo technology, turbocharger (220): TwinScroll turbocharger, High Precision Direct higecton, VALVETRONIC fuly variable valve control, Double-VANOS variable camsha					165	
Fuel tark capacity Approx. Itr 51 51 51 Engine oil ¹⁵ Itr 4.25 4.25 5.22 Weight, unladen, to DINEU kg 1410/1485 1415/1490 1485/1560 Max load to DIN kg 630 630 633 Max ade load, front/rear kg 1010/1055 1015/1055 1075/1065 Max ade load, front/rear kg 1010/730 1500/735 1500/735 Max trailer load, kg 1100/730 1500/735 1500/735 1500/735 Max trailer load, kg 75/75 75/75 75/75 75/75 Max roofload/max towbar kg 75/75 75/75 75/75 Max roofload/max towbar kg 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Luggage comp capacity ttr 645–1905 645–1905 645–1905 ConfigNo of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 Engine echnology BMW TwinPower Turbo technology: turbocharger (220: TwinScroll turbocharger, High Phecision Direct Injection, VALVETRONC fully variable						
Engine oil ¹⁰ Itr 4.25 5.22 Weight, unladen, to DINIEU kg 1410/1485 1415/1490 1485/1560 Max lead to DIN kg 630 630 633 Max permissible weight kg 2055 2060 (2090) 2140 Max axel load, front/rear kg 1010/1055 1015/1055 1075/1065 Max trailer load, kg 1100/730 1500/735 1500/735 Max roofload/max towbar kg 75/75 75/75 75/75 download 645–1905 645–1905 645–1905 Luggage comp capacity Itr 645–1905 645–1905 645–1905 Ar resistance C _a x A 0.30 x 2.45 0.32 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/4/4 In-line/3/4 Efficitive capacity cc 1499 1499 1989 Strokebore mm 94.6/82.0 94.6/82.0 94.6/82.0 Comfresion ratio :1 11.0	v				51	
Weight, unladen, to DIN/EU kg 1410/1485 1415/1490 1485/1560 Max load to DIN kg 630 630 630 630 Max load to DIN kg 630 630 630 630 Max ade load, front/rear kg 1010/1055 1015/1055 1075/1065 Max trailer load, kg 1100/730 1500/735 1500/735 Max trailer load, kg 75/75 75/75 75/75 Max trailer load, kg 75/75 75/75 75/75 download Luggage comp capacity Itr 645–1905 645–1905 645–1905 Air resistance C _a x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/4/4 Engine technology BMW TwinPower Turbo technology: turbocharger (220): TwinScroll turbocharger, 146P Procision Direct Injection, VALVETRONIC fully variable Valve control, Double-VANOS variable camshaft timing Effective capacity cc 1499 1990 Torkehore mm						
Max permissible weight kg 2055 2060 (2090) 214(Max ave load, front/rear kg 1010/1055 1015/1055 1075/1065 Max rate load, front/rear kg 1100/1055 1015/1055 1007/50 Braked (12%)/ubraked kg 75/75 75/75 75/75 Max roofload/max towbar kg 75/75 75/75 75/75 download Luggage comp capacity Itr 645–1905 645–1905 645–1905 Air resistance C _d × A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/4/4 Engine technology BMW TwinPower Turbo technology: turbocharger (220: TwinScroll turbocharger), High Precision Direct Injection, VAL VETRONIC fully variable valve control, Double-VANOS variable camshaft timing Effective capacity cc 1499 1990 StrokeBore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.0 11.0 Fuel min. RON 91 <td< td=""><td></td><td></td><td></td><td>1415/1490</td><td>1485/1560</td></td<>				1415/1490	1485/1560	
Max permissible weight kg 2055 2060 (2090) 2140 Max ake load, front/rear kg 1010/1055 1015/1055 1075/1063 Max trailer load, kg 1100/730 1500/735 1500/755 Braked (12%)/ubraked 12%0/ubraked 1500/735 1500/755 Max roofload/max towbar kg 75/75 75/75 75/75 download 1 645–1905 645–1905 645–1905 Liggage comp capacity Itr 645–1905 6445–1905 645–1905 Air resistance C _d × A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyts/valves In-line/3/4 In-line/3/4 In-line/4/4 Engine technology BMW TwinPower Turbo technology: turbocharger (220: TwinScroll turbocharger), High Precision Direct Injection, VAL VETRONIC fully variable Value mm 94.682.0 94.682.0 94.682.0 Compression ratio :1 11.0 11.0 11.1 Fuel min. RON 91 min. RON 91 min. RON 91 Max output	Max load to DIN	ka	630	630	630	
Max axle load, front/rear kg 1010/1055 1015/1055 1075/1065 Max trailer load, Max trailer load, Max rooffoad/max towbar kg 1100/730 1500/735 1500/755 Braked (12%)/unbraked Max rooffoad/max towbar kg 75/75 75/75 75/75 Max rooffoad/max towbar kg 75/75 75/75 75/75 75/75 Air resistance C _d x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Effective capacity cc 1499 1990 1990 1990 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0 94.6/82.0	Max permissible weight	-	2055	2060 (2090)	2140	
Max trailer load, Braked (12%)/unbraked kg 1100/730 1500/735 1500/735 Bark trailer load, Max roofload/max towbar kg 75/75 75/75 75/75 download Luggage comp capacity Itr 645–1905 645–1905 645–1905 Air resistance C _d x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Power Unit Config/No of cyls/valves In-line/3/4 In-line/4/4 Engine technology BMW TwinPower Turbo technology: turbocharger (220:: TwinSCroll turbocharger), High Precision Direct Injection, VALVE TRONC fully variable valve control, Double-VANOS variable camshaft timing Effective capacity cc 1499 1999 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.0 11.0 Fuel min. RON 91 min. RON 91 min. RON 91 min. RON 91 1350–4600 Max output kW/hp 80/109 103/140 14/11/92 280/20: at rpm 1350–3800 1480–4200 1350–4600 Suspension, front </td <td></td> <td></td> <td></td> <td>1015/1055</td> <td>1075/1065</td>				1015/1055	1075/1065	
Max roofload/max towbar kg 75/75 75/75 75/75 download Luggage comp capacity Itr 645–1905 645–1905 645–1905 Air resistance C _d x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Effective capacity Cc 14/9 14/9 1996 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.0 Fuel min.RON 91 min.RON 91 min.RON 91 1491 Max output kW/hp 80/109 103/140 14/179 at rpm 4100–6500 4500–6500 5000–6000 Max output kW/hp 80/109 103/140 14/179 Max output kW/hp 80/109 103/140 14/179 Max output kW/hp 80/109 103/140 14/179 Suspension, front Single-joint spring-strut	,	kg	1100/730	, , ,	1500/750	
Luggage comp capacity Itr 645–1905 645–1905 645–1905 Air resistance C _a x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Config/No of cyls/valves In-line/3/4 In-line/3/4 In-line/3/4 In-line/3/4 Engine technology BMW TwinPower Turbo technology: turbocharger (220): TwinScroll turbocharger), High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft iming Effective capacity cc 1499 1499 1996 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.0 11.0 Fuel min. RON 91 Max output kW/hp 80/109 103/140 141/192 at rpm 1350–3800 1480–4200 1350–4600 Battery / installation Ah/– 70/ Engine compartment Single-joint spring-strut axle in l	Max roofload/max towbar	kg	75/75	75/75	75/75	
Air resistance C _d x A 0.30 x 2.45 0.28 x 2.45 0.32 x 2.45 Power Unit Config/No of cy/Svlaves In-line/3/4 In-line/3/4 In-line/4/4 Engine technology BMWT WinPower Turbo technology: turbocharger (220): TwinScroll turbocharger), High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing Effective capacity cc 1499 1996 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.1 Fuel min.RON 91 min.RON 91 min.RON 91 Max output kW/hp 80/109 103/140 141/192 at rpm 4100-6500 4500-6500 5000-6000 Max output kW/hp 80/109 103/140 141/192 at rpm 130/140 280/200 1350-4600 Max output kW/hp 80/109 1350-4600 Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Suspension, rear Central-arm axle in lightwe		ltr	645-1905	645-1905	645–1905	
Config/No of cyls/valves In-line/3/4 In-line/3				0.28 x 2.45	0.32 x 2.45	
Config/No of cyls/valves In-line/3/4 In-line/3						
Engine technology BMW TwinPower Turbo technology: turbocharger (220: TwinScroll turbocharger), High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing Effective capacity cc 1499 1999 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.1 Fuel min. RON 91 min. RON 91 min. RON 91 Max output kW/hp 80/109 103/140 141/192 at rpm 4100-6500 4500-6500 5000-600 Max output kW/hp 80/109 103/140 141/192 at rpm 4100-6500 4500-6500 5000-600 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350-3800 1480-4200 1350-4600 Electrical System Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Suspension, rear Central-arm axle in lightweight construction Suspen						
turbocharger), High Precision Direct Injection, VALVETRONIC fully variable valve control, Double-VANOS variable camshaft timing Effective capacity cc 1499 1499 1996 Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.0 Fuel min. RON 91 min. RON 91 min. RON 91 min. RON 91 Max output kW/hp 80/109 103/140 141/192 at rpm 4100-6500 4500-6500 5000-6600 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350-3800 1480-4200 1350-4600 Electrical System Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes / vented Brakes ortorol), DBC (Dynamic Brake Control), DB C (Cornering Brake Control), DBC (Dynamic Brake Control), DB raking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/50 R17 95M	- · ·					
Stroke/bore mm 94.6/82.0 94.6/82.0 94.6/82.0 Compression ratio :1 11.0 11.0 11.0 Fuel min.RON 91 min.RON 91 min.RON 91 11.0 Max output kW/hp 80/109 103/140 141/192 at rpm 4100-6500 4500-6500 5000-6000 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350-3800 1480-4200 1350-4600 Electrical System Electrical System Electrical System Electrical System Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, rear Central-arm axle in lightweight steel construction Barkes, front Single-joint spring-strut axle in lightweight construction Brakes, rear Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant, Drive Performance Control; optional: Dynamic Damper Control Safety equipment		t	turbocharger), High Prec	cision Direct Injection, VAL	/ETRONIC fully variable	
Compression ratio :1 11.0 11.0 11.0 Fuel min. RON 91 min. RON 91 min. RON 91 min. RON 91 Max output kW/hp 80/109 103/140 141/192 at rpm 4100-6500 4500-6500 5000-6000 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350-3800 1480-4200 1350-4600 Electrical System Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Brakes, front Single-piston floating-calliper disc brakes Vented Brakes, rear Single-piston floating-calliper disc brakes Vented Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Damper Control) Optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and bel force li	Effective capacity	СС	1499	1499	1998	
Fuel min. RON 91 min. RON 91 min. RON 91 Max output kW/hp 80/109 103/140 141/192 at rpm 4100–6500 4500–6500 5000–6000 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350–3800 1480–4200 1350–4600 Electrical System Electrical System Battery / installation Ah/– 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Brakes, front Single-joint spring-strut axle in lightweight construction Brakes, front Brakes, rear Single-joint floating-calliper disc brakes / vented Brakes, rear Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering	Stroke/bore	mm	94.6/82.0	94.6/82.0	94.6/82.0	
Max output kW/hp 80/109 103/140 141/192 at rpm 4100–6500 4500–6500 5000–6000 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350–3800 1480–4200 1350–4600 Electrical System Electrical System Electrical System Battery / installation Ah/– 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Brakes, front Brakes, rear Single-piston floating-calliper disc brakes / vented Brakes, rear Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for fort and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (E	Compression ratio	:1	11.0	11.0	11.0	
at rpm 4100–6500 4500–6500 5000–6000 Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350–3800 1480–4200 1350–4600 Electrical System Battery / installation Ah/– 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety	Fuel		min. RON 91	min. RON 91	min. RON 91	
Max torque Nm/lb-ft 190/140 220/162 280/207 at rpm 1350-3800 1480-4200 1350-4600 Electrical System Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Single-joint spring-strut axle in lightweight steel construction Battery / installation Ah/- 70/ Engine compartment 70/ Engine construction Brakes, front Single-joint spring-strut axle in lightweight steel construction Standard:	Max output	kW/hp	80/109	103/140	141/192	
at rpm 1350–3800 1480–4200 1350–4600 Electrical System Battery / installation Ah/– 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	at	rpm	4100-6500	4500-6500	5000-6000	
Electrical System Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), DT Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	Max torque	Nm/lb-ft		220/162	280/207	
Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W					1350-4600	
Battery / installation Ah/- 70/ Engine compartment 70/ Engine compartment 70/ Engine compartment Driving Dynamics and Safety Suspension, front Single-joint spring-strut axle in lightweight steel construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	Electrical System					
Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W		Ah/- 70)/ Engine compartment	70/ Engine compartment	70/ Engine compartment	
Suspension, front Single-joint spring-strut axle in lightweight steel construction Suspension, rear Central-arm axle in lightweight construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	Driving Dynamics and Safe	tv				
Suspension, rear Central-arm axle in lightweight construction Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W			Single-joint sprin	a-strut axle in lightweight s	teel construction	
Brakes, front Single-piston floating-calliper disc brakes / vented Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W						
Brakes, rear Single-piston floating-calliper disc brakes Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	/					
Driving stability systems Standard: DSC incl. ABS and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W			• •	· · ·		
Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; Drive Performance Control; optional: Dynamic Damper Control Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W			· · ·	· · ·		
Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	Driving Stability Systems		Brake Control), DBC (Dy Compensation, St	namic Brake Control), Dry art-Off Assistant; Drive Per	Braking function, Fading formance Control;	
front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force limiter at the front seats Steering Electric Power Steering (EPS); optional: Servotronic function Steering ratio, overall :1 16.0 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	Cofety aggingerst			· · · ·		
SteeringElectric Power Steering (EPS); optional: Servotronic functionSteering ratio, overall:116.016.016.0Tyres, front/rear205/60 R16 96V205/60 R16 96V205/55 R17 95W	Safety equipment	front passenger, head airbags for front and rear seats, three-point inertia-reel seatbelts on all seats with belt stopper, belt latch tensioner and belt force				
Steering ratio, overall :1 16.0 16.0 16.0 Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W	Steering		Flectric Power St		votronic function	
Tyres, front/rear 205/60 R16 96V 205/60 R16 96V 205/55 R17 95W		•1				
		. 1				
	Rims, front/rear		7.0J x 16 light alloy	7.0J x 16 light alloy	7.5J x 17 light alloy	

		BMW 216i	BMW 218i	BMW 220
Transmission				
Type of transmission		Six-speed manual	Six-speed manual	seven-speed DCT
51		•	(optional: seven-speed	
			DCT)	
Gear ratios	1 :	1 3.615	3.615 (17.348)	15.304
	II :'	1 1.952	1.952 (10.232)	9.026
	: ::	1 1.241	1.241 (6.593)	5.735
	IV :	1 0.969	0.969 (4.615)	4.015
	V :	1 0.806	0.806 (3.572)	3.108
	VI :	1 0.683	0.683 (2.819)	2.487
	VII :	1	(2.285)	2.016
	VIII :	1		
	R :	1 3.538	3.538 (15.892)	13.825
Performance				
Power-to-weight ratio	kg/kV	V 17.6	13.7 (14.0)	10.5
Output per litre	kW/lt	r 53.4	68.7	70.6
0–100 km/h	se	c 11.7	9.5 (9.8)	7.6
In 5th gear 80–120 km/h	See	c 14.9	11.4 (–)	-
Top speed	km/ł	า 188	205 (205)	222
BMW EfficientDynamic	s			
BMW EfficientDynamics		Brake Energy Regeneratio	n with recuperation display,	Electric Power Steering
standard features		(EPS), Auto Start Stop func	tion, Optimum Shift Indicato	r (manual gearbox), ECO
		PRO mode, coasting funct	tion (automatic), intelligent lig	ghtweight construction,
		optimised aerodynamic attr	ibutes, on-demand operatio	n of ancillary units, map-
		regulated oil pu	mp, tyres with reduced rollin	ng resistance
Fuel Consumption ECE	2)			
Urban	ltr/100	7.4–7.1	7.3–7.3 (7.2–7.2)	7.4*
	kn			
Extra-urban	ltr/100		5.2-5.0 (5.3-5.2)	5.4*
	kn			0.1
Combined	ltr/100		6.0–5.9 (6.0)	6.1*
	kn	יייי <i>ב</i> ייי ז	()	

Urban	ltr/100	7.4–7.1	7.3–7.3 (7.2–7.2)	7.4*
	km			
Extra-urban	ltr/100	5.3–5.1	5.2–5.0 (5.3–5.2)	5.4*
	km			
Combined	ltr/100	6.1–5.9	6.0–5.9 (6.0)	6.1*
	km			
CO ₂	g/km	139–134	137–134 (137)	140*
Emission rating		EU6	EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight) Figures in brackets apply to models with automatic transmission

 11 Oil change 21 The fuel consumption, CO₂ emissions and operating range figures were determined according to the European Regulation (EC) 715/2007 in the version applicable at the time of type approval. The figures refer to a vehicle with basic configuration in Germany and the range shown considers the different size of the selected wheels and tires. The values are already based on the new WLTP regulation and are translated back into NEDC-equivalent values in order to ensure the comparison between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO₂ emissions, the CO₂ values may differ to the values stated here (depending on national legislation). The CO₂ efficiency specifications are determined according to Directive 1999/94/EC and the Pkw-EnVKV, and based (for classification) on the fuel consumption and CO₂ values as per the NEDC *Fuel consumption and CO₂ values based on NEDC.

The BMW Series 2 Gran Tourer. 216d, 218d, 218d xDrive.

		Diniti E lou	Biiiii 2 iou	Billi 2 loa xBillo
Body				
No of doors/seats		5/5	5/5	5/5
Length/width/height (unladen)	mm	4568/1800/1608	4568/1800/1608	4568/1800/1608
Wheelbase	mm	2780	2780	2780
Track, front/rear	mm	1561/1562	1557/1558	1557/1558
Ground clearance	mm	165	165	165
Turning circle	m	11.7	11.7	11.7
Fuel tank capacity	Approx. Itr	51	51	51
Engine oil ¹⁾	ltr	4.8	5.5	5.5
Weight, unladen, to DIN/EU	kg	1480/1555	1515/1590	1590/1665
- 3 -, ,	5	(1500/1575)	(1540/1615)	(1610/1685
Max load to DIN	kg	630	630	630
Max permissible weight	kg	2130 (2155)	2170 (2205)	2245 (2265)
Max axle load, front/rear	kg	1055/1090	1090/1090	1125/1130
,	0	(1075/1090)	(1130/1090)	(1150/1125)
Max trailer load,	kg	1500/750	1500/750	1600/750
Braked (12%)/unbraked	_			
Max roofload/max towbar	kg	75/75	75/75	75/75
download				
Luggage comp capacity	ltr	645–1905	645–1905	645–1905
Air resistance	Cd x A	0.28 x 2.45	0.28 x 2.45	0.29 x 2.45
Power Unit				1 11 1414
Config/No of cyls/valves		In-line/3/4	In-line/4/4	In-line/4/4
Engine technology			rbo technology: variable-ge	, ,
	(2		ti-stage charging, variable-g	
		2496	rect injection with solenoid	
Effective capacity Stroke/bore	cc mm	90.0/84.0	<u> </u>	
Compression ratio	:1	16.5	16.5	16.5
Fuel		Diesel	Diesel	Diesel
Max output	kW/hp	85/116	110/150	110/150
at	rpm	4000	4000	4000
Max torque	Nm/lb-ft	270/199	350/258	350/258
at	rpm	1750-2250	1750-2500	1750-2500
	ipin	1730 2230	1750 2500	1730 2300
Electrical System				
Battery / installation	Δh/_ 70/	- · · ·	70/ Engine compartment	70/ Engine compartment
	AII/- 70/	Engine compartment	70/ Engine compartment	Tor Engine compartment
		Engine compartment		
			• ·	• ·
Suspension, front		Single-joint sprin	g-strut axle in lightweight s	teel construction
Suspension, front Suspension, rear		Single-joint sprin Central-	g-strut axle in lightweight s arm axle in lightweight cons	teel construction struction
Suspension, front Suspension, rear Brakes, front		Single-joint sprin Central- Single-pisto	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak	teel construction struction ses / vented
Suspension, front Suspension, rear Brakes, front Brakes, rear	ty	Single-joint sprin Central- Single-pisto Single-	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc	teel construction struction es / vented brakes
Suspension, front Suspension, rear Brakes, front Brakes, rear	r ty Star	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction	teel construction struction es / vented brakes i Control), CBC (Cornering
Suspension, front Suspension, rear Brakes, front Brakes, rear	t y Star B	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction mamic Brake Control), Dry I	teel construction struction es / vented brakes I Control), CBC (Cornering Braking function, Fading
Suspension, front Suspension, rear Brakes, front Brakes, rear	t y Star B	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off /	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked v	teel construction struction es / vented brakes i Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive
Suspension, front Suspension, rear Brakes, front Brakes, rear	t y Star B	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off / system (21)	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked v 8d xDrive), Drive Performan	teel construction struction brakes Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control;
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems	star Bi Cor	Single-joint sprin Central- Single-pisto Single- single- dard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off system (21) opti	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc and DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked v 8d xDrive), Drive Performar onal: Dynamic Damper Cor	teel construction struction les / vented brakes i Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; htrol
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems	ty Star B Cor S	Single-joint sprin Central- Single-pistc Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off system (21) opti tandard: airbags for dri	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked \ 8d xDrive), Drive Performar onal: Dynamic Damper Cor ver and front passenger, sid	teel construction struction les / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; htrol de airbags for driver and
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems	ty Star B Cor S	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off system (21) opti tandard: airbags for dri nt passenger, head air	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked V 8d xDrive), Drive Performan onal: Dynamic Damper Cor ver and front passenger, sid bags for front and rear seat	teel construction struction les / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; strol de airbags for driver and s, three-point inertia-reel
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems	ty Star B Cor S	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off system (21: opti tandard: airbags for dri int passenger, head air seatbelts on all s	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked V 8d xDrive), Drive Performan onal: Dynamic Damper Cor ver and front passenger, sic bags for front and rear seat seats with belt stopper, bell	teel construction struction es / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; trol de airbags for driver and s, three-point inertia-reel : latch tensioner
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems Safety equipment	ty Star B Cor S	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off system (21: opti tandard: airbags for dri tandard: airbags for dri seatbelts on all and b	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked 8d xDrive), Drive Performan onal: Dynamic Damper Cor ver and front passenger, sid bags for front and rear seat seats with belt stopper, bell elt force limiter at the front	teel construction struction es / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; trol de airbags for driver and s, three-point inertia-reel : latch tensioner seats
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems Safety equipment	ty Star B Cor S	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off / system (21) opti system (21) opti tandard: airbags for dri nt passenger, head air seatbelts on all s and b	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked v 8d xDrive), Drive Performan onal: Dynamic Damper Cor ver and front passenger, sid bags for front and rear seat seats with belt stopper, bell elt force limiter at the front ectric Power Steering (EPS	teel construction struction es / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; throl de airbags for driver and s, three-point inertia-reel latch tensioner seats
Suspension, front Suspension, rear Brakes, front Brakes, rear Driving stability systems Safety equipment Steering	star B Cor S fro	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off / system (21: opti system (21: opti tandard: airbags for dri seatbelts on all s and b El optional: Ser	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked v 8d xDrive), Drive Performan onal: Dynamic Damper Cor ver and front passenger, sid bags for front and rear seat seats with belt stopper, bell elt force limiter at the front ectric Power Steering (EPS votronic function, variable s	teel construction struction es / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; throl de airbags for driver and s, three-point inertia-reel latch tensioner seats s); port steering
	ty Star B Cor S	Single-joint sprin Central- Single-pisto Single- ndard: DSC incl. ABS a rake Control), DBC (Dy mpensation, Start-Off / system (21) opti system (21) opti tandard: airbags for dri nt passenger, head air seatbelts on all s and b	g-strut axle in lightweight s arm axle in lightweight cons on floating-calliper disc brak piston floating-calliper disc ind DTC (Dynamic Traction namic Brake Control), Dry I Assistant; DSC networked v 8d xDrive), Drive Performan onal: Dynamic Damper Cor ver and front passenger, sid bags for front and rear seat seats with belt stopper, bell elt force limiter at the front ectric Power Steering (EPS	teel construction struction es / vented brakes I Control), CBC (Cornering Braking function, Fading with xDrive all-wheel-drive ice Control; throl de airbags for driver and s, three-point inertia-reel latch tensioner seats

BMW 216d

BMW 218d

BMW 218d xDrive

			BMW 216d	BMW 218d	BMW 218d xDrive
Transmissio	on				
Type of trans	mission		Six-speed manual	Six-speed manual	Six-speed manua
51000		qo)	tional: seven-speed	(optional: eight-speed	(optional: eight-spee
			DCT)	Steptronic)	Steptronic
Gear ratios		:1	3.923 (16.385)	3.923 (5.519)	3.539 (5.519
		:1	2.136 (9.664)	2.136 (3.184)	1.923 (3.184
		:1	1.276 (6.181)	1.276 (2.050)	1.219 (2.050
	IV	:1	0.921 (4.327)	0.919 (1.492)	0.881 (1.492
	V	:1	0.756 (3.349)	0.725 (1.235)	0.810 (1.235
	VI	:1	0.628 (2.663)	0.605 (1.000)	0.674 (1.000
	VII	:1	(2.158)	(0.801)	(0.801
	VII	:1		(0.673)	(0.673
	R	:1	3.538 (14.898)	3.538 (4.221)	3.831 (4.221
Performanc					
Power-to-we	-	kg/kW	17.4 (17.6)	13.8 (14.0)	14.5 (14.6
Output per lit	0	kW/ltr	56.8	55.1	14.5 (14.6
0–100 km/h	16		11.5 (11.5)	9.4 (9.4)	
In 5th gear	80–120 km/h	sec	12.5	9.4 (9.4)	9.1 (9.4
Top speed	00-120 KI1/II	sec	192 (192)	205 (207)	205 (205
T OP Speed		KII/II	152 (152)	203 (207)	200 (200
	entDynamics				
BMW Efficier				eration with recuperation dis	
standard feat	ures	S	0 . //	art Stop function, Optimum	,
				mode, coasting function (au	
				on, optimised aerodynamic a	
		ope	ration of ancillary units	s, map-regulated oil pump, t resistance	yres with reduced rolling
Fuel Consu	mption ECE ²⁾				
Urban		ltr/100 km	4.9 (4.7)	5.4–5.2 (5.3–5.2)	5.9 (5.4
Extra-urban		ltr/100 km	4.1 (4.3)	4.2-4.1 (4.4-4.2)	4.8 (4.5
Combined		ltr/100 km	4.4 (4.5–4.4)	4.6-4.6 (4.7-4.6)	5.2 (4.8
COmbined CO ₂		g/km	116 (117–117)	121–120 (125–121)	137 (127
		giniii		121-120(123-121)	137 (127

 CO_2 Emission rating

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight) Figures in brackets apply to models with automatic transmission

¹⁾ Oil change ²⁾ The fuel consumption, CO₂ emissions and operating range figures were determined according to the European Regulation (EC) 715/2007 in the version applicable at the time of type approval. The figures refer to a vehicle with basic configuration in Germany and the range shown considers the different size of the selected wheels and tires. The values are already based on the new WLTP regulation and are translated back into NEDC-equivalent values in order to ensure the comparison between the vehicles. With respect to these vehicles, for vehicle-related taxs or other duties based (at least inter alia) on CO₂ emissions, the CO₂ values may differ to the values stated here (depending on national legislation). The CO₂ efficiency specifications are determined according to Directive 1999/94/EC and the Pkw-EnVKV, and based (for classification) on the fuel consumption and CO₂ values as per the NEDC.

EU6

EU6

EU6

The BMW Series 2 Gran Tourer. 220d, 220d xDrive.

		BMW 220d	BMW 220d xDrive
Body			
No of doors/seats		5/5	5/5
Length/width/height (unladen)	mm	4568/1800/1608	4568/1800/1608
Wheelbase	mm	2780	2780
Track, front/rear	mm	1557/1558	1557/1558
Ground clearance	mm	165	165
Turning circle	m	11.7	11.7
Fuel tank capacity	app. ltr	51	51
Engine oil ¹⁾	ltr	5.5	5.5
Weight, unladen, to DIN/EU	kg	1555/1630	1615/1690
Max load to DIN	kg	630	630
Max permissible weight	kg	2220	2280
Max axle load, front/rear		1125/1100	1145/1140
Max trailer load,	kg	1500/750	1600/750
,	kg	1500/750	1600/750
Braked (12%)/unbraked Max roofload/max towbar	ka	75/75	75/75
download	kg	75/75	75/75
	ltr	645–1905	645–1905
Luggage comp capacity	-		
Air resistance	Cd x A	0.30 x 2.45	0.31 x 2.45
Power Unit			
Config/No of cyls/valves		In-line/4/4	In-line/4/4
Engine technology	BN	/W TwinPower Turbo technology: multi-stag turbocharger, common-rail direct injection w	
Effective capacity	CC	1995	1995
Stroke/bore	mm	90.0/84.0	90.0/84.0
Compression ratio	:1	16.5	16.5
Fuel		Diesel	Diesel
Max output	kW/hp	140/190	140/190
at	rpm	4000	4000
Max torque	Nm/lb-ft	400/295	400/295
at	rpm	1750-2500	1750-2500
Electrical System Battery / installation	Ah/-	70/ Engine compartment	70/ Engine compartment
Dattery / Installation		707 Engine compartment	70/ Engine compartment
Driving Dynamics and Safe	ety		
Suspension, front		Single-joint spring-strut axle in lightweig	
Suspension, rear		Central-arm axle in lightweight	
Brakes, front		Single-piston floating-calliper disc	brakes / vented
Brakes, rear		Single-piston floating-calliper	
Driving stability systems		ndard: DSC incl. ABS and DTC (Dynamic Tra	
		rake Control), DBC (Dynamic Brake Control),	
	Co	mpensation, Start-Off Assistant; DSC networ	ked with xDrive all-wheel-drive
		system (220d xDrive), Drive Perfo	rmance Control;
		optional: Dynamic Damper	
Safety equipment		ndard: airbags for driver and front passenger,	0
	pass	enger, head airbags for front and rear seats, t	
		on all seats with belt stopper, belt latch tens	ioner and belt force limiter
		at the front seats	
Steering		Electric Power Steering	
		optional: Servotronic fu	
Steering ratio, overall	:1	16.0	16.0
Tyres, front/rear		205/55 R17 95W	205/55 R17 95W
Rims, front/rear		7.5J x 17 light alloy	7.5J x 17 light alloy

			BMW 220d	BMW 220d xDrive
Transmission				
Type of transmission			Eight-speed Steptronic	Eight-speed Steptronic
Gear ratios		:1	5.519	5.519
	11	:1	3.184	3.184
		:1	2.050	2.050
	IV	:1	1.492	1.492
	V	:1	1.235	1.235
	VI	:1	1.000	1.000
	VII	:1	0.801	0.801
	VII	:1	0.673	0.673
	R	:1	4.221	4.221
Performance				
Power-to-weight ratio		kg/kW	11.1	11.5
Output per litre		kW/ltr	70.2	70.2
0–100 km/h		sec	8.0	7.8
In 5th gear 80–120 km/	/h	sec	_	-
Top speed		km/h	220	218
BMW EfficientDynam	ics			
BMW EfficientDynamics	;	Br	ake Energy Regeneration with recuper	ation display, Electric Power
standard features		Stoorir	ng (EPS) Auto Start Stop function EC	O PRO model coasting function

standard features

Steering (EPS), Auto Start Stop function, ECO PRO mode, coasting function, intelligent lightweight construction, optimised aerodynamic attributes, ondemand operation of ancillary units, map-regulated oil pump, tyres with reduced rolling resistance

Fuel Consumption ECE²⁾

Urban	ltr/100 km	5.1	5.4
Extra-urban	ltr/100 km	4.3	4.6
Combined	ltr/100 km	4.6-4.6	4.9–4.8
CO ₂	g/km	122–121	129–128
Emission rating		EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)


¹⁰ Oil change ²¹ The fuel consumption, CO₂ emissions and operating range figures were determined according to the European Regulation (EC) 715/2007 in the version applicable at the time of type approval. The figures refer to a vehicle with basic configuration in Germany and the range shown considers the different size of the selected wheels and tires. The values are already based on the new WLTP regulation and are translated back into NEDC-equivalent values in order to ensure the comparison between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO₂ emissions, the CO₂ values may differ to the values stated here (depending on national legislation). The CO₂ efficiency specifications are determined according to Directive 1999/94/EC and the Pkw-EnVKV, and based (for classification) on the fuel consumption and CO₂ values as per the NEDC.

216i

01/2018 Page 7


Output and torque diagrams. The BMW Series 2 Gran Tourer.



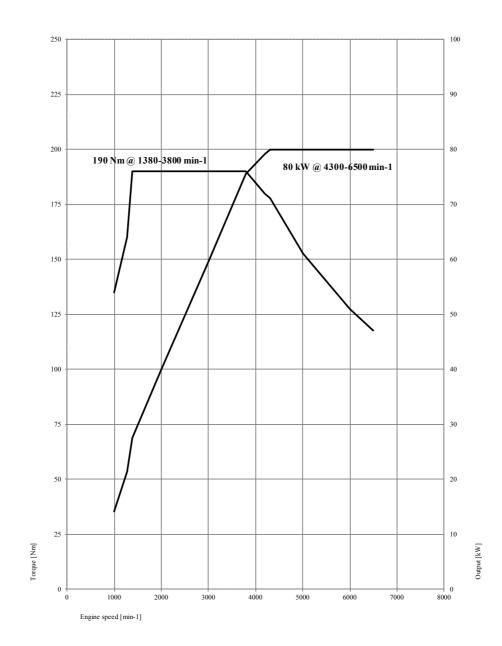


01/2018 Page 8

The BMW Series 2 Gran Tourer. 218i

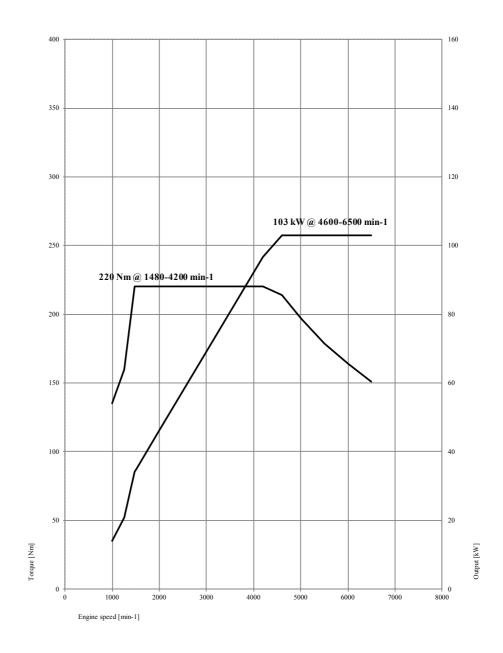


01/2018 Page 9

The BMW Series 2 Gran Tourer. 220i

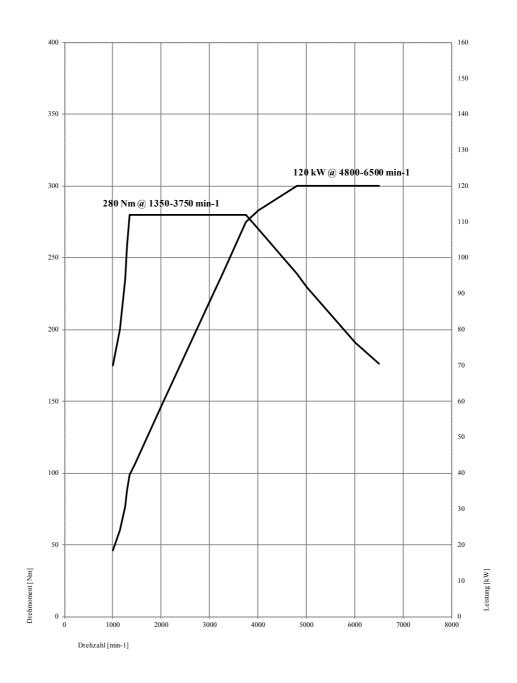


01/2018 Page 10

The BMW Series 2 Gran Tourer. 216d.

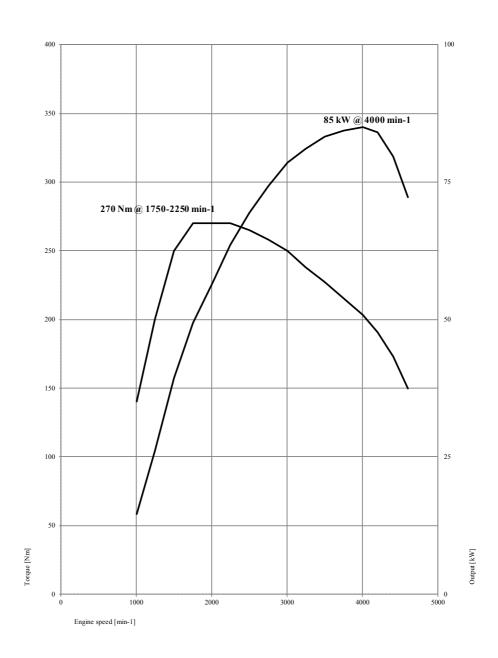


01/2018 Page 11

The BMW Series 2 Gran Tourer. 218d.

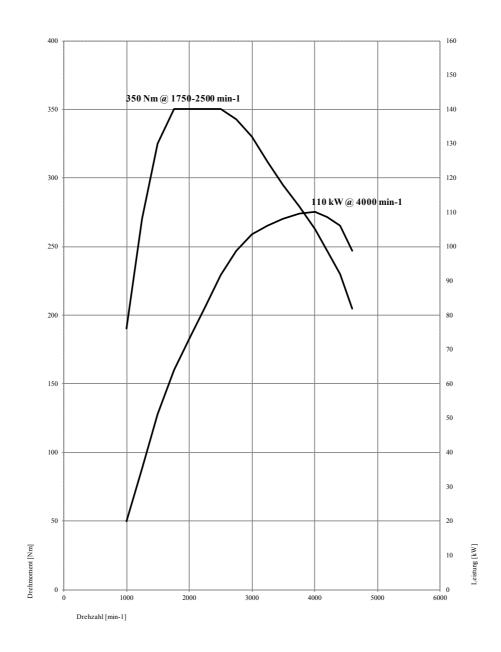


01/2018 Page 12


The BMW Series 2 Gran Tourer. 220d.

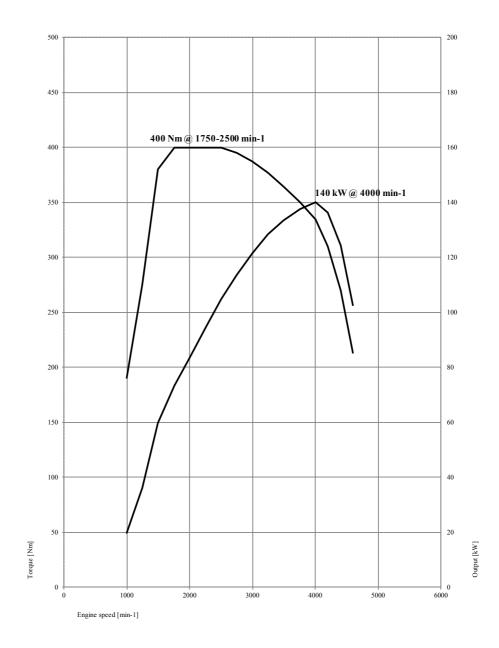


01/2018 Page 13 **Exterior and interior dimensions.** The BMW Series 2 Gran Tourer.



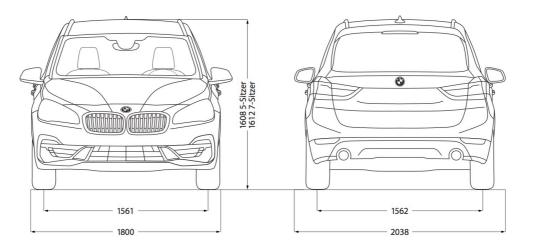

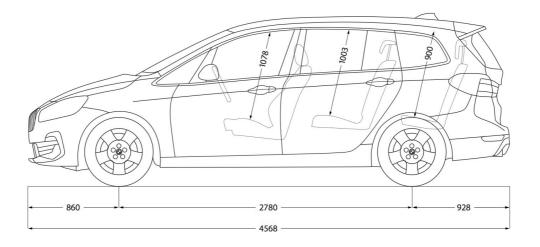

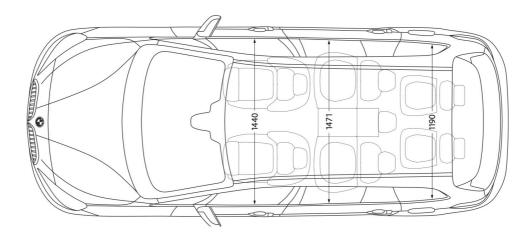

*dimensions in cm