BMW M8 Convertible. M8 Competition.

Body 2 / 4 No of doors/seats 2 / 4 Length/width/height (unladen) mm 4867 / 1907 / 1353	BMW M8 Competition Convertible			
No of doors/seats 2/4				
Length/width/neight (unladeri) mm 4867 / 1907 / 1353				
W/s = s/s = = = 2007				
Wheelbase mm 2827				
Track, front/rear mm 1627 / 1632 Ground clearance mm 3				
diodrid clearance min				
Turning circle m 12.2				
Fuel tank capacity approx. I 68				
Engine oil 1) 10.0				
Weight, unladen, to DIN/EU kg 2010 / 2085				
Max load to DIN kg 430				
Max permissible weight kg 2440				
Max axle load, front/rear kg 1215 / 1260				
Max trailer load, braked kg (12%)/unbraked -/-				
(12%)/unbraked -/- Max roofload/max towbar kg -/-				
download				
Luggage comp capacity I 350				
Air resistance c _d x A ³⁾				
Power Unit				
Config/No of cyls/valves V / 8 / 4				
Engine technology M TwinPower Turbo technology with cross-bank exhaust manifold: M Tw	inScroll			
twin turbocharger, indirect charge air cooling, High Precision Injection (m. injection pressure: 350 bar), VALVETRONIC fully variable valve timir Double-VANOS variable camshaft timing	aximum			
Effective capacity cc 4395				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91)				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight aluming the suspension of the company of the compan	nium			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics,	nium			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific kinematics and lastokinematics, Variable Damper Control				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 - 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers				
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight aluminum construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminum construction of the suspension with five-link axle in lightweight aluminum construction of the suspension with five-link axle in lightweight aluminum construction of the suspension with five-link axle in lightweight aluminum construction of the suspension with five-link axle in lightweight aluminium construction of the suspension with five-link axle in lightweight aluminium construction of the suspension with five-link axle in lightweight aluminium construction of the suspension with five-link axle in lightweight aluminium construction of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, variable Damper Control of the suspension with five-link axle i	ruction,			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/– 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, rear M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with single-piston floating callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be sw off; CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry E function, Start-Off Assistant, Active M Differential, DSC linked with	ruction,			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/– 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumin construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminum construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with six-piston floating callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be sw off; CBC (Cornering Brake Control), DRC (Dynamic Brak	itched Braking			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 1.0.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/— 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with six-piston fixed callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be sw off; CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dy E function, Start-Off Assistant, Active M Differential, DSC linked with M xDrive all-wheel drive Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and passenger, side airbags for front and rear seats, three-point inertia-reel so on all seats with belt stopper, belt latch tensioner and belt force limiter,	ruction, itched braking			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/- 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with single-piston floating callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be sw off; CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry E function, Start-Off Assistant, Active M Differential, DSC linked with M xDrive all-wheel drive Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and passenger, head airbags for front and rear seats, three-point inertia-reel's on all seats with belt stopper, belt latch tensioner and belt force limiter sensors, rollover protection system, tyre pressure indicator Steering Electric Power Steering (EPS) with M-specific Servotronic function as	ruction, ritched Braking and front eatbelts crash			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/– 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumic construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with six-piston floating callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be sw off; CBC (Cornering Brake Control), DPC (Dynamic Brake Control), DPC function, Start-Off Assistant, Active M Differential, DSC linked with M xDrive all-wheel drive Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and passenger, head airbags for front and rear seats, three-point inertia-reel so on all seats with belt stopper, belt latch tensioner and belt force limiter, sensors, rollover protection system, tyre pressure indicator Steering Electric Power Steering (EPS) with M-specific Servotronic function a variable sport ratio	ruction, ritched Braking and front eatbelts crash			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/– 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumin construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with single-piston floating callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Brakes) are a passenger, head airbags for driver and front passenger, side airbags for driver and front passenger, side airbags for driver and front passenger, side airbags for driver and passenger, side airbags for driver and front passenger, side airbags for driver and passenger, side airbags for driver and front passenger,	ruction, ritched Braking and front eatbelts crash			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/– 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumin construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, serious and serious and elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with six-piston fixed callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Mode (MDM), can be sw off; CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry function, Start-Off Assistant, Active M Differential, DSC linked with M xDrive all-wheel drive Safety equipment Standard: airbags for driver and front passenger, side airbags for driver and passenger, side airbags for driver and passenger, head airbags for front and rear seats, three-point inertia-reel so nall seats with belt stopper, belt latch tensioner and belt force limiter, sensors, rollover protection system, tyre pressure indicator Steering Electric Power Steering (EPS) with M-specific Servotronic function of variable sport ratio Steering ratio, overall :1 14.3 Tyres, front/rear	ruction, ritched Braking and front eatbelts crash			
Effective capacity cc 4395 Stroke/bore mm 88.3 / 89.0 Compression ratio :1 10.0 Fuel RON 98 (min. RON 91) Max output kW/hp 460 / 625 at rpm 6000 Max torque Nm 750 at rpm 1800 – 5800 Electrical System Battery/installation Ah/– 70 (Li-ion) / Luggage compartment Driving Dynamics and Safety Suspension, front Adaptive M suspension with double wishbone axle in lightweight alumin construction, M-specific kinematics and elastokinematics, Variable Damper Control Suspension, rear Adaptive M suspension with five-link axle in lightweight aluminium construction, M-specific elastokinematics, Variable Damper Control Brakes, front M compound brakes, vented, with six-piston fixed callipers Brakes, rear M compound brakes, vented, with single-piston floating callipers Driving stability systems Standard: DSC incl. ABS, ASC and M Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Dynamic Brake Control), DPC (Brakes) are a passenger, head airbags for driver and front passenger, side airbags for driver and front passenger, side airbags for driver and front passenger, side airbags for driver and passenger, side airbags for driver and front passenger, side airbags for driver and passenger, side airbags for driver and front passenger,	ruction, ritched Braking and front eatbelts crash			



BMW M8 Competition Convertible

Power Transfer

M xDrive intelligent all-wheel-drive system, central transfer case with fullyvariable multi-plate clutch, fully-variable torque distribution between front and rear axle, rear differential with fully-variable Active M Differential, locking effect 0 – 100 per cent

Transmission		
Type of transmission		Eight-speed M Steptronic transmission with Drivelogic, transmission oil cooling
Gear ratios I	:1	5.000
II	:1	3.200
III	:1	2.143
- IV	′ :1	1.720
V	:1	1.313
V	l :1	1.000
V	II :1	0.823
V	III :1	0.640
R	:1	3.478
Final drive	:1	3.154
Performance		
Power-to-weight ratio (DIN)	kg/kW	4.4
Output per litre	kW/l	104.7
Acceleration 0–100 km/h	S	3.3
Acceleration 0–200 km/h	S	11.1
Top speed	km/h	250 / 305 ²⁾

BMW EfficientDynamics

BMW EfficientDvnamics standard features

Brake Energy Regeneration, Electric Power Steering, Auto Start Stop function, Optimum Shift Indicator in manual shift mode, BMW EfficientLightweight, on-demand operation of ancillary units, Li-ion battery, map-regulated oil pump, rear differential and transfer case with optimised efficiency, optimised aerodynamics (underside panelling, front spoiler, rear spoiler)

Fuel Consumption	ECE		
with standard tyres			
Urban	l/100 km	15.2 – 15.1	
Extra-urban	l/100 km	8.3 – 7.9	
Combined	l/100 km	10.8 – 10.6	
CO ₂	g/km	246 – 241	
Emission rating		Euro 6d-TEMP	

Specifications apply to ACEA markets/data relevant to homologation applies in part only to Germany (weight)

The fuel consumption, CO2 emission and electric power consumption figures are determined according to the European Regulation (EC) 2007/715 in the version applicable. The figures refer to a vehicle with basic configuration in Germany. The range shown considers the different sizes of the selected wheels/tyres and the selected items of optional equipment, and may vary during configuration.


The values are based on the new WLTP test cycle and are translated back into NEDC-equivalent values in order to ensure comparability between the vehicles. With respect to these vehicles, for vehicle-related taxes or other duties based (at least inter alia) on CO₂ emissions, the CO₂ values may differ from the values stated here (depending on national legislation).

Further information on official fuel consumption figures and specific CO₂ emission values of new passenger cars is included in the following guideline: 'Leitfaden über den Kraftstoffverbrauch, die CO₂-Emissionen und den Stromverbrauch neuer Personenkraftwagen' (Guide to the fuel economy, CO₂ emissions and electric power consumption of new passenger cars), which can be obtained free of charge from all dealerships, from Deutsche Automobil Treuhand GmbH (DAT), Hellmuth-Hirth-Str. 1. 73760 Ostfildern-Scharnhausen and at https://www.dat.de/co2/.

¹⁾ Oil change with filter
2) Governed / with optional M Driver's Package

³⁾ Figures not yet available

BMW M8 Convertible. M8 Competition.

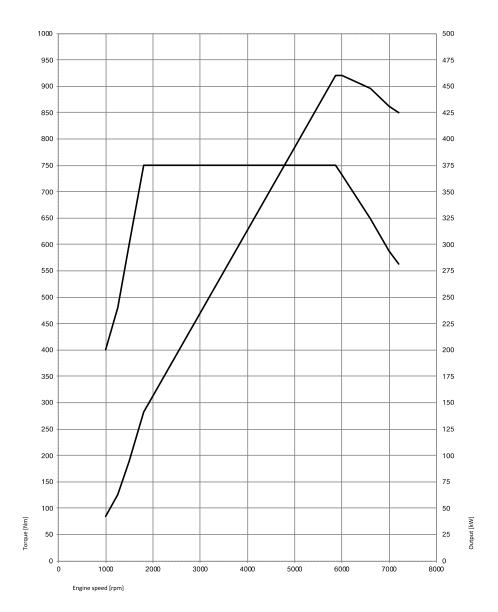

Exterior and interior dimensions. BMW M8 Convertible.



